


Features

1. Molded epoxy body.
2. Zero crossing circuit.
3. High input/output insulation.
4. Small size and light weight.
5. Can be installed directly on the PC board.
6. Fast reactive speed.
7. Normally open.


Applications

1. Household Appliances.
2. Temperature Control System.
3. Industrial Automatic Control.
4. Lighting System.
5. Office Appliances.
6. Factory Appliances.

Outside Dimension : Unit (mm)

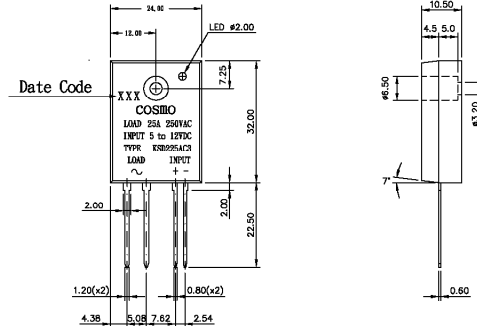

Schematic : Top View

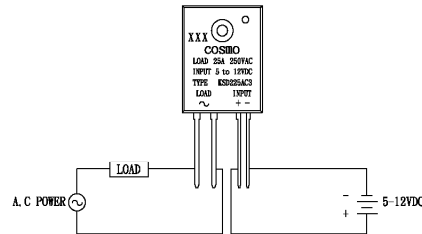

Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Rating	Unit
Input	Input Signal Voltage	5~12	VDC
	Drop-out Voltage	1	VDC
Output	RMS on-state current	25	Arms
	Peak one cycle surge current (8.3 ms)	250	A
	Repetitive peak-off state Voltage	600	V
	Operating frequency	47~70	Hz
	Critical rate of rise of on-state current	50	A/μS
	Load supply voltage	250	Vrms AC
Isolation Voltage input to output	Viso	4000	Vrms
Operating Temperature	Topr	-30~100	°C
Storage Temperature	Tstg	-30~125	°C
Soldering Temperature 10 Sec	Tsol	260	°C

Electrical Characteristics

(Ta=25°C)

Parameter	Symbol	Conditions	MIN	TYP	MAX	Unit
Input	Pick-up Voltage	I _T =1Arms			4	VDC
	Input current	V _{in} =5-12V	5		36	mA
Output	On-state Voltage	I _T =1Arms			1.5	Vrms
	Operating Current	V _{out} =240Vrms	50			mArms
	Leakage Current	V _{out} =240Vrms			7	mArms
	Critical rate of rise of off-state Voltage	See Note 1	50	200		V/μS
	Zero-cross Voltage				Yes	
	Load Voltage Rating	V _{out}	I _T =50mArms MIN	50		280
Minimum trigger current	I _{FT}	V _{DRM} =600V			25	mA
Isolation resistance input to output	R _{iso}	DC500V	10 ¹⁰			Ω
Turn-on time	T _{on}	60Hz AC			8.3	mS
Turn-off time	T _{off}	60Hz AC			8.3	mS
Thermal resistance (between junction and case)	R _{th (j-C)}			1.3		°C/W

Note 1 : Output (dv/dt) protection is provided in all models, and they are designed to switch resistive or inductive loads to 0.2 power factor. The dv/dt rating is based on source impedance of 50 ohms.

Data Curve

Fig.1 RMS On-state Current vs. Ambient Temperature

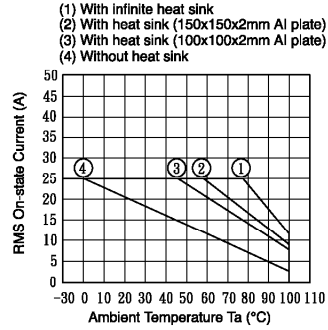


Fig.2 Surge Current vs. Time

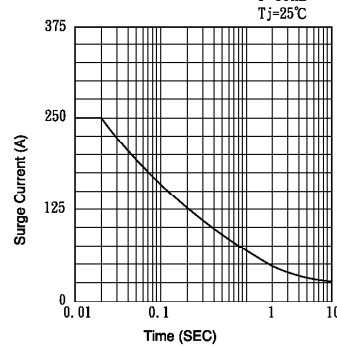


Fig.3 Open Circuit Leak Current vs. Supply Voltage




Fig.4 RMS On-state Current vs. Case Temperature

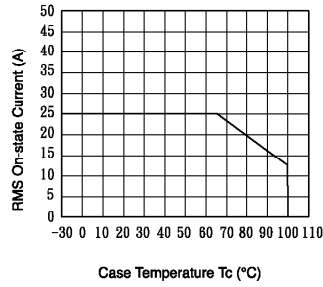


Fig.5 Input Voltage vs. Ambient Temperature

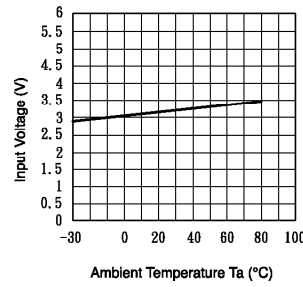


Fig.6 Input Current vs. Input voltage




Fig.7 Action waveform




Fig.8 WIRING DIAGRAM

