

*High Power Solid-State LED Light Source*

# LUSTRON DX3

## Introduction

For a brighter solid-state light source, Lustrous Technology is proud to release the new **LUSTRON DX3**. Ideal for your high lumen output design, **LUSTRON DX3** has the ability to generate extremely high lumen output from 1,000 to 2,000 lm on one single LED product. The **LUSTRON DX3** is energy efficient, and provides high efficiency while performing its high lumen for all types of Commercial and Architectural applications. A 20-watt driver is all you need to start the high lumen engine for your next bright design.

Note: To optimize the performance and lifetime, please maintain a constant current of less than the indicated  $T_b$  at 50° C.

**LUSTRON DX3**

---

---

**LUSTROUS**<sup>®</sup>

*GREEN TECHNOLOGY OF LIGHTING*

**LUSTRON DX3 Part Number Matrix**

Table.1

Color	P/N
Warm White	L320CLHWBA(28V,750mA)
	L320CLDYBA(14V,1500mA)
Neutral White	L320MWHWCA(28V,750mA)
	L320MWDYCA(14V,1500mA)
Cool White	L320NHWDA(28V,750mA)
	L320NWDYDA(14V,1500mA)

**LUSTRON DX3 Part Number Matrix**

Chip Material	GaN Base
---------------	----------

**LUSTRON DX3 Part Number Matrix**


16 Chips Array
----------------

---

**LUSTRON DX3**

**Mechanical Dimensions**


**LUSTRON X3**

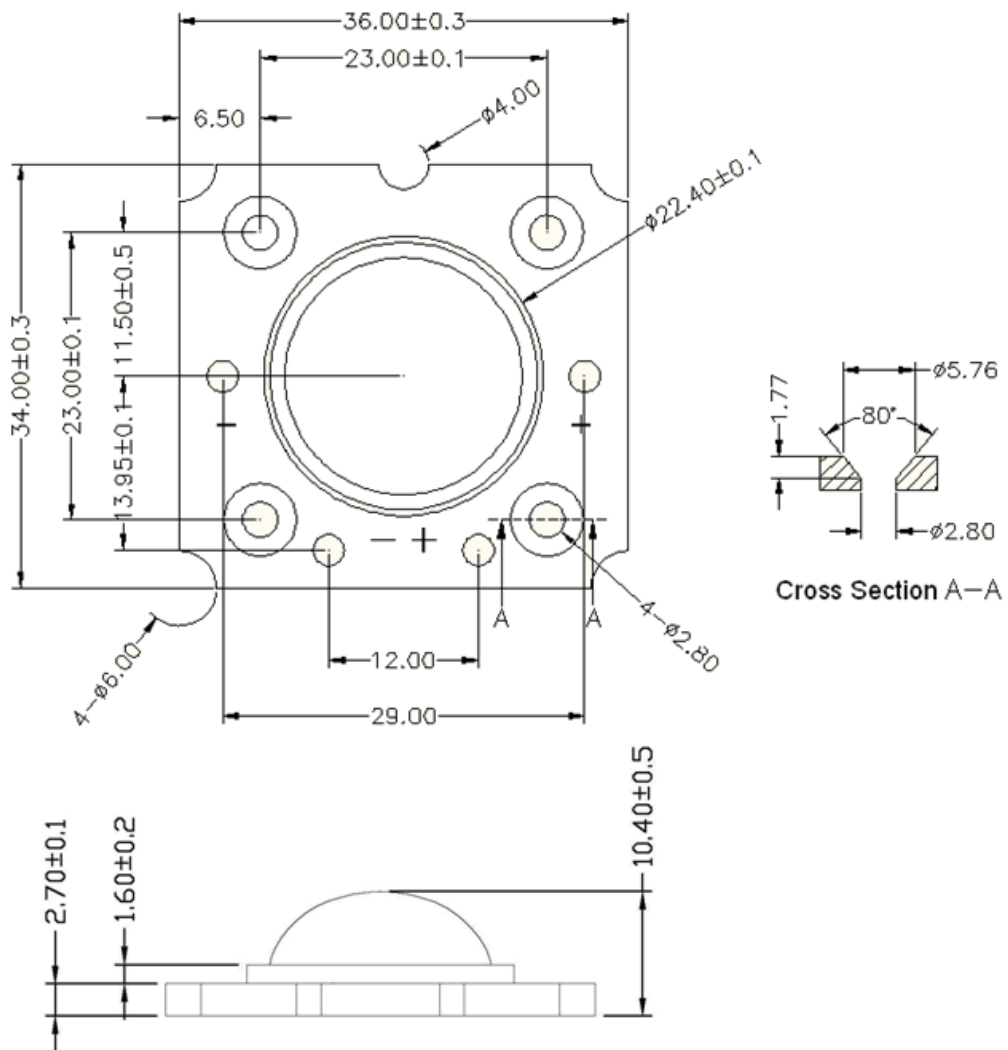

Note: These drawings are not for scale. All dimensions are in millimeters.

**LUSTRON DX3**

### Recommended installation screw pitch

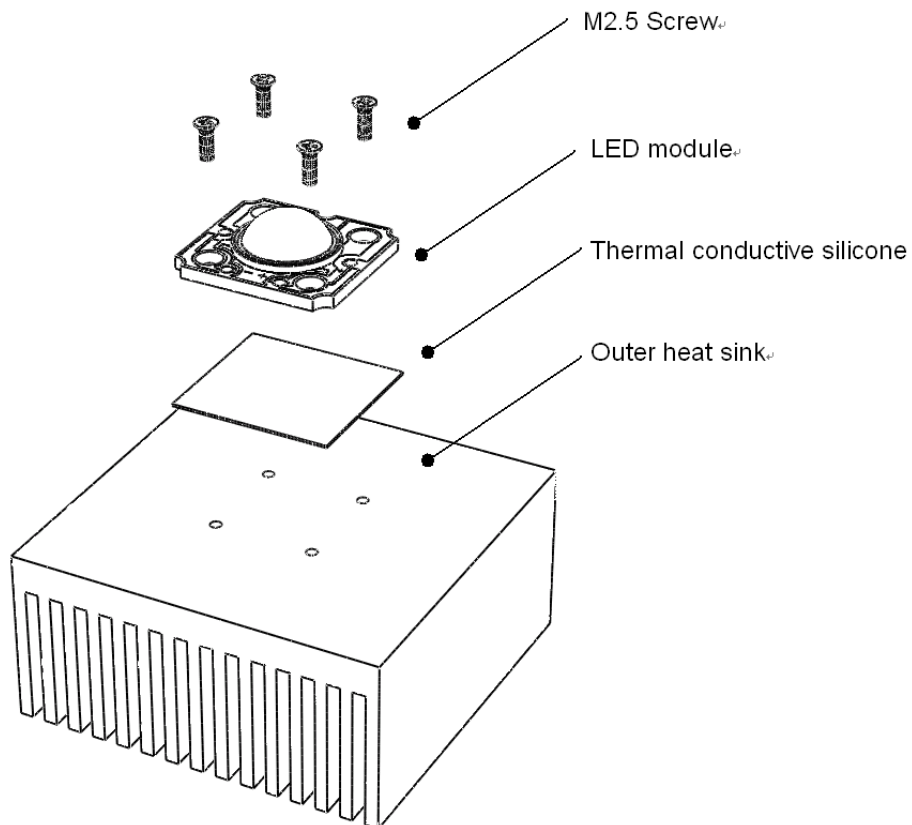

**Warning:**

**Do not** touch the lighting surface area during installation.

# LUSTROUS<sup>®</sup>

GREEN TECHNOLOGY OF LIGHTING

## Flux Characteristics At Junction Temperature T<sub>j</sub> = 25<sup>o</sup>C

Table.2

Color	Luminous flux (lm)		
	Minimum	Typical	Maximum
Warm White ( 2700K) L320CLHWBA L320CLDYBA	860 lm	1000 lm	1100 lm
Neutral White ( 4000K) L320MWHWCA L320MWDYCA	1100 lm	1350 lm	1600 lm
Cool White ( 5500K) L320NWHWDA L320NWDYDA	1300 lm	1600 lm	2000 lm

Note1: Luminous flux is measured in total power with a tolerance rate of +/- 10%. Minimum luminous flux performance is guaranteed from the above data.

Note2: Higher luminous flux will be available in the future.

## Optical Characteristics

Table.3

Color	λ <sub>d</sub> ( nm ) or CCT( K )			Viewing Angle (degrees)	CRI
	Min	Typ	Max		
Warm White	2500K	2700K	3250K	~140	85
Neutral White	3250K	4000K	4750K		75
Cool White	4750K	6000K	10000K		65

Note1: CRI value is measured with tolerable errors of +/- 10%

# LUSTRON DX3

## Electrical Characteristics

Table.4

Color	Forward Voltage (V) for 750 mA forward current		
	Min	Typ	Max
	L320CLHWBA L320MWHWCA L320NWHWDA	24.8	26.4
L320CLDYBA L320MWDYCA L320NWDYDA	12.4	13.2	14.4

Note1: Lustrous Technology allows a tolerance rate of +/- 10% for Lustrous products voltage measurement.

Note2: All figures are measured from the above forward current at 750mA.

## Absolute Maximum Ratings

Table.5

Parameters	For 1000mA forward current L320CLHWBA/ L320MWHWCA/ L320NWHWDA	
	Advised DC Forward Current (mA)	750
Max. DC Forward Current (mA)	1000	
LED Junction Temperature (°C)	110	
ESD Sensitivity	+/- 4kV (HBM)	
Thermal Resistance (°C/W)	~0.5	
Operating Temperature (°C)	-20 ~ +80	
Storage Temperature (°C)	-20 ~ +50	
Soldering Temperature (°C)	260 (duration should be less than 5 seconds)	

**LUSTRON DX3**

---

# LUSTROUS<sup>®</sup>

GREEN TECHNOLOGY OF LIGHTING

Parameters	For 2000mA forward current	
	L320CLDYBA/ L320MWDYCA/ L320NWDYDA	
Advised DC Forward Current (mA)	1500	
Max. DC Forward Current (mA)	2000	
LED Junction Temperature (°C)	110	
ESD Sensitivity	+/- 4kV (HBM)	
Thermal Resistance (°C/W)	~0.5	
Operating Temperature (°C)	-20 ~ +80	
Storage Temperature (°C)	-20 ~ +50	
Soldering Temperature (°C)	260 (duration should be less than 5 seconds)	

Note1: To avoid exceeding the maximum junction temperature, please set the forward current with caution.

Note2: If you decide to set the maximum DC current for Lustrous products, please pay attention on the thermal design of your luminaries. solution should be considered more serious.

---


## LUSTRON DX3

# LUSTROUS<sup>®</sup>

GREEN TECHNOLOGY OF LIGHTING


Relative Intensity vs. Current (T<sub>j</sub> = 25°C)

L320CLHWBA/ L320MWHWCA/ L320NHWDA

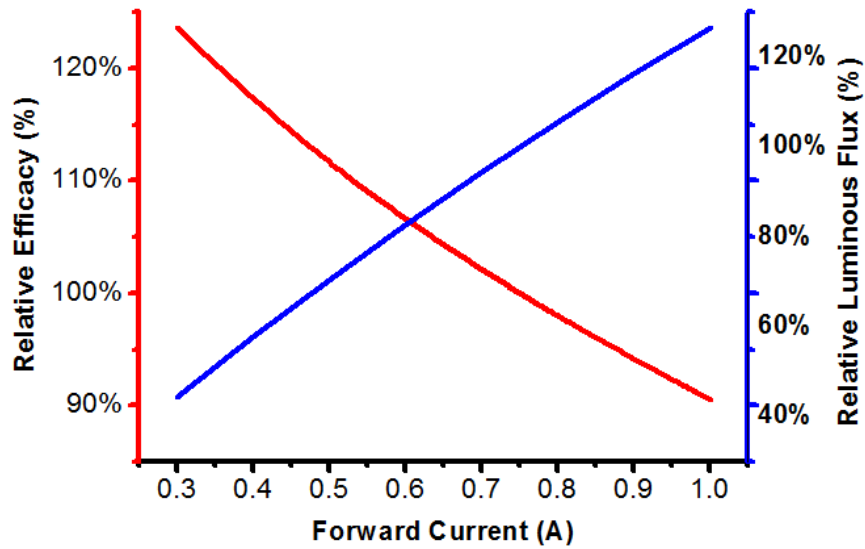

Forward Voltage vs. Current (T<sub>j</sub> = 25°C)

L320CLHWBA/ L320MWHWCA/ L320NHWDA

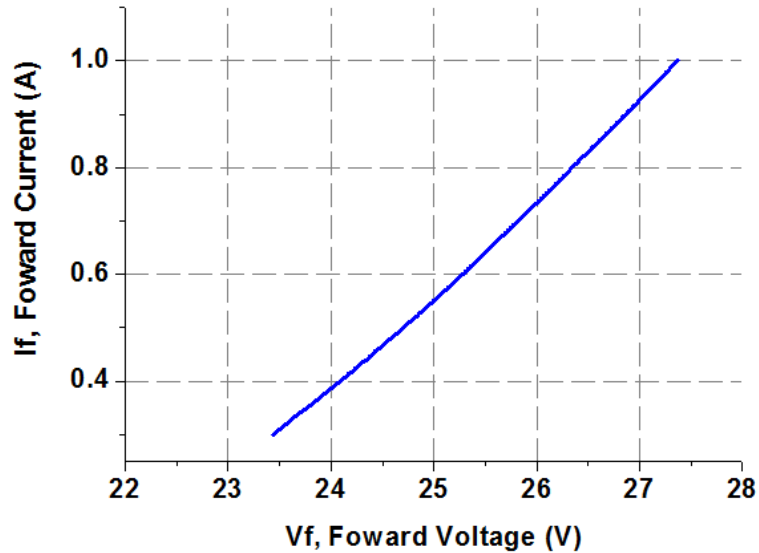

## LUSTRON DX3




# LUSTROUS<sup>®</sup>

GREEN TECHNOLOGY OF LIGHTING


Relative Intensity vs. Current (T<sub>j</sub> = 25°C)

L320CLDYBA/ L320MWDYCA/ L320NWDYDA

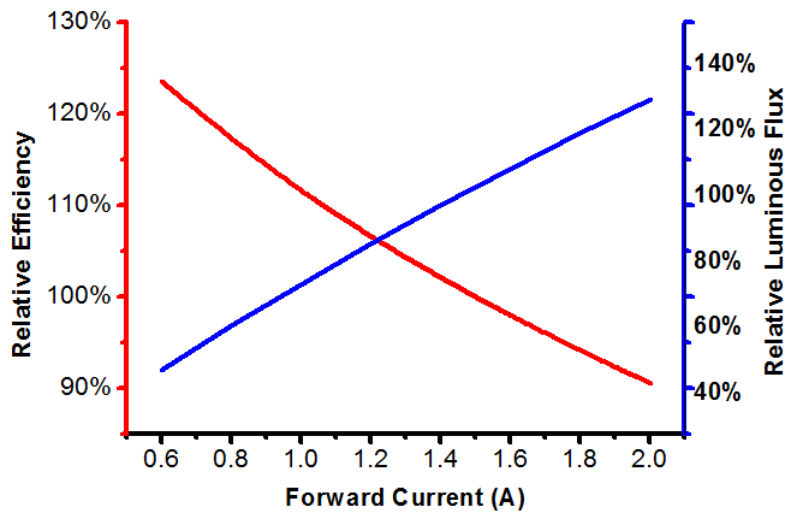

Forward Voltage vs. Current (T<sub>j</sub> = 25°C)


L320CLDYBA/ L320MWDYCA/ L320NWDYDA

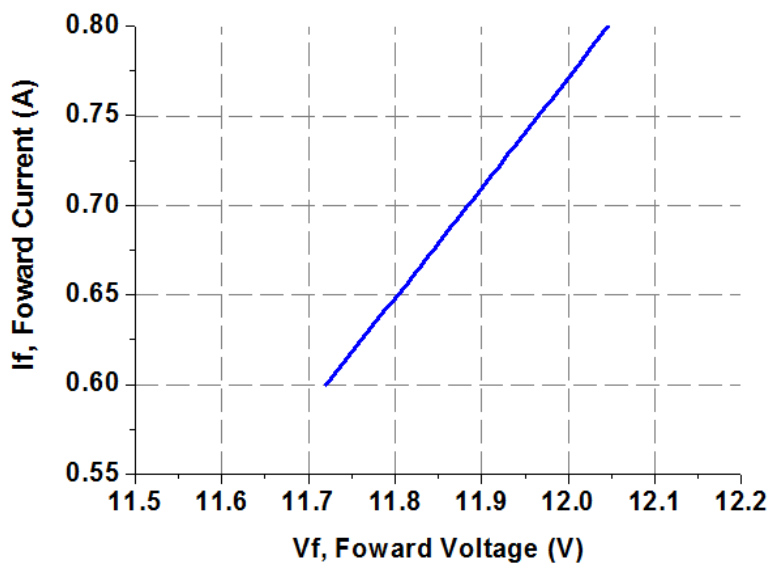


## LUSTRON DX3

**Relative Spectral Power**

**Warm White (3000K)**

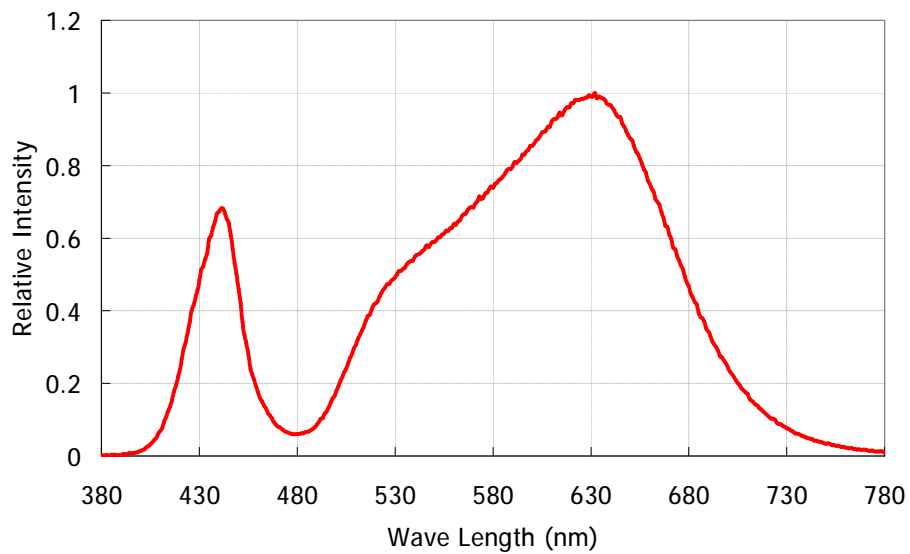


**Neutral White (4000K)**

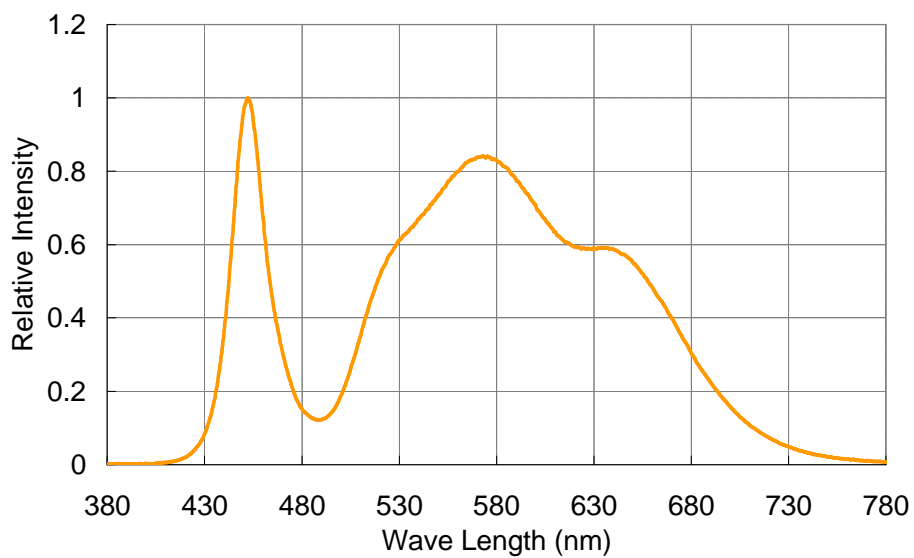

---

**LUSTROUS**<sup>®</sup>  
*GREEN TECHNOLOGY OF LIGHTING*

Cool White (5700K)

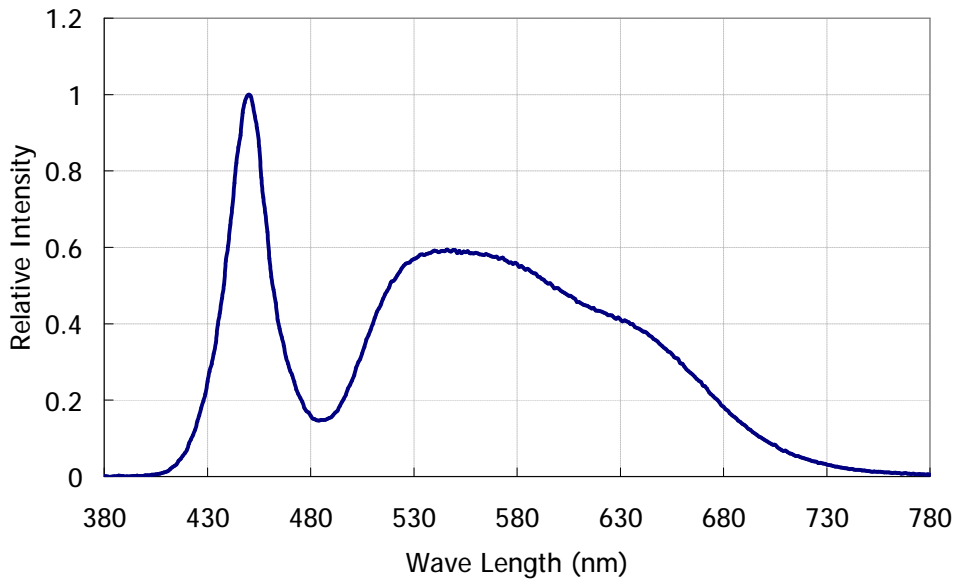


---

**LUSTRON DX3**


---

**LUSTROUS**<sup>®</sup>  
GREEN TECHNOLOGY OF LIGHTING

**Typical Angular Beam Profile,  $T_j=25^{\circ}\text{C}$  \***

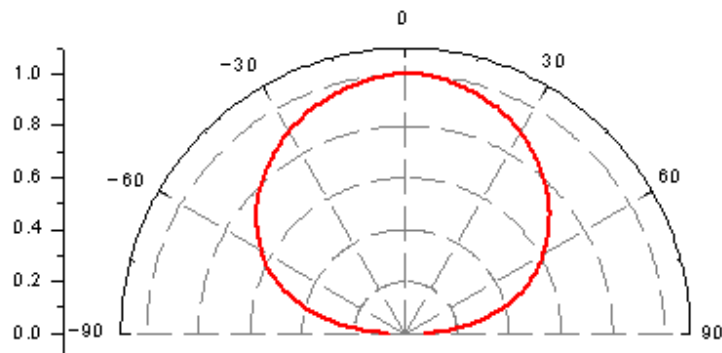

**View Angle: 140 degree**

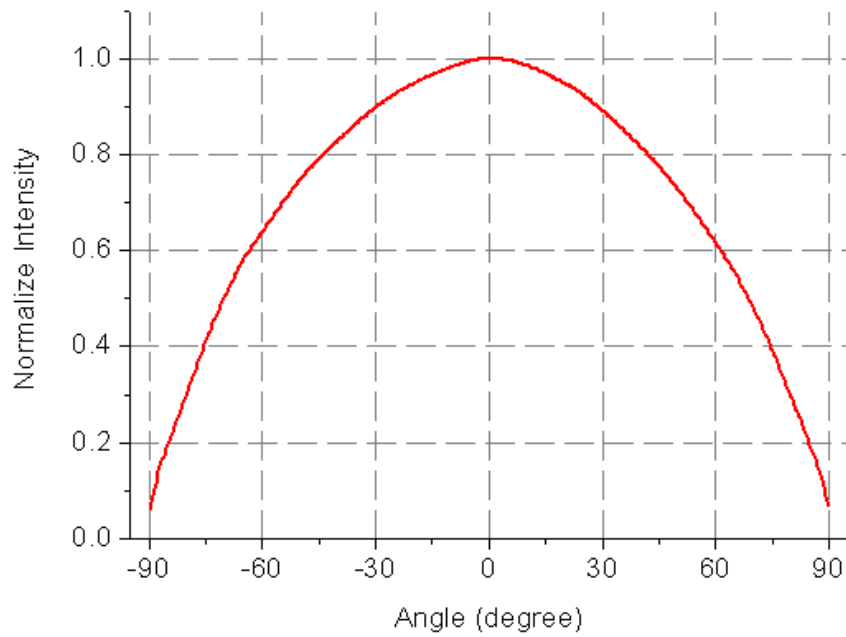

Note: Detailed beam profile data is now available

**LUSTRON DX3**

---

## Product Binning

In the manufacturing process, there is a natural variation of specifications between LEDs. In order to minimize variation in the end product of application, Lustrous Technology uses the current ANSI code binning procedures to measure its products for performance in luminous flux and chromaticity.

The tables below list the standard photometric bins for Lustrous LED products (tested and binned at the indicated test current). **Product availability in a particular bin varies by product and production run. Please contact your Lustrous sales representative for further information regarding product availability.**

## Binning Condition

Table.6

Color	Forward Current (mA)
L320CLHWBA	750
L320MWHWCA	
L320NWHWDA	
L320CLDYBA	1500
L320MWDYCA	
L320NWDYDA	

**LUSTROUS**<sup>®</sup>  
GREEN TECHNOLOGY OF LIGHTING

**Luminous Flux Binning Information \***

Table.7

BIN Code	Lv (lm)	
	min.	max.
A	5	20
B	20	40
C	40	60
D	60	80
E	80	110
F	110	140
G	140	170
H	170	200
I	200	240
J	240	280
K	280	320
L	320	360

BIN Code	Lv (lm)	
	min.	max.
M	360	400
N	400	450
O	450	500
P	500	580
Q	580	660
R	660	740
S	740	860
T	860	980
U	980	1100
V	1100	1300
W	1300	1600
X	1600	2000


Note: Luminous flux is measured in total power with a tolerance rate of +/- 10%.

**LUSTRON DX3**

**Chromaticity Binning Information \*\***

**Warm White**

CL Bin Table (2600K~3250K)

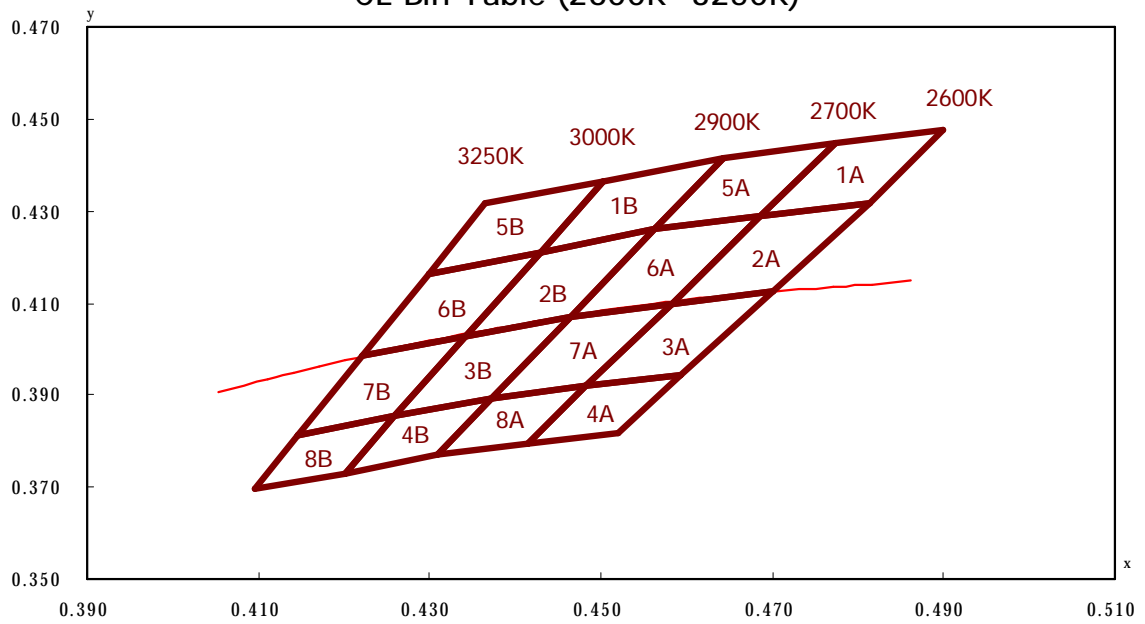

Note: Chromaticity is measured in Chromaticity Coordinate (CIE 1931-xy) with a tolerance rate of +/- 10%.

**LUSTROUS**<sup>®</sup>  
GREEN TECHNOLOGY OF LIGHTING

Table.8

Warm-White Bin Coordinates												
CCT (K)			BIN CODE	Chromaticity Coordinate (CIE 1931-xy)								
Min	Typ.	Max		x1	y1	x2	y2	x3	y3	x4	y4	
2600	2700	2900	A	1A	0.4687	0.4289	0.4774	0.4447	0.4900	0.4477	0.4813	0.4319
				2A	0.4582	0.4099	0.4687	0.4289	0.4813	0.4319	0.4700	0.4126
				3A	0.4483	0.3919	0.4582	0.4099	0.4700	0.4126	0.4593	0.3944
				4A	0.4414	0.3794	0.4483	0.3919	0.4593	0.3944	0.4519	0.3818
				5A	0.4562	0.4260	0.4642	0.4416	0.4774	0.4447	0.4687	0.4289
				6A	0.4465	0.4071	0.4562	0.4260	0.4687	0.4289	0.4582	0.4099
				7A	0.4373	0.3893	0.4465	0.4071	0.4582	0.4099	0.4483	0.3919
				8A	0.4309	0.3769	0.4373	0.3893	0.4483	0.3919	0.4414	0.3794
2900	3000	3250	B	1B	0.4430	0.4212	0.4503	0.4366	0.4642	0.4416	0.4562	0.4260
				2B	0.4342	0.4028	0.4430	0.4212	0.4562	0.4260	0.4465	0.4071
				3B	0.4259	0.3853	0.4342	0.4028	0.4465	0.4071	0.4373	0.3893
				4B	0.4201	0.3731	0.4259	0.3853	0.4373	0.3893	0.4309	0.3769
				5B	0.4299	0.4165	0.4364	0.4316	0.4503	0.4366	0.4430	0.4212
				6B	0.4221	0.3984	0.4299	0.4165	0.4430	0.4212	0.4342	0.4028
				7B	0.4147	0.3814	0.4221	0.3984	0.4342	0.4028	0.4259	0.3853
				8B	0.4095	0.3694	0.4147	0.3814	0.4259	0.3853	0.4201	0.3731


**LUSTRON DX3**



---

**LUSTROUS**<sup>®</sup>  
GREEN TECHNOLOGY OF LIGHTING

**Neutral White**

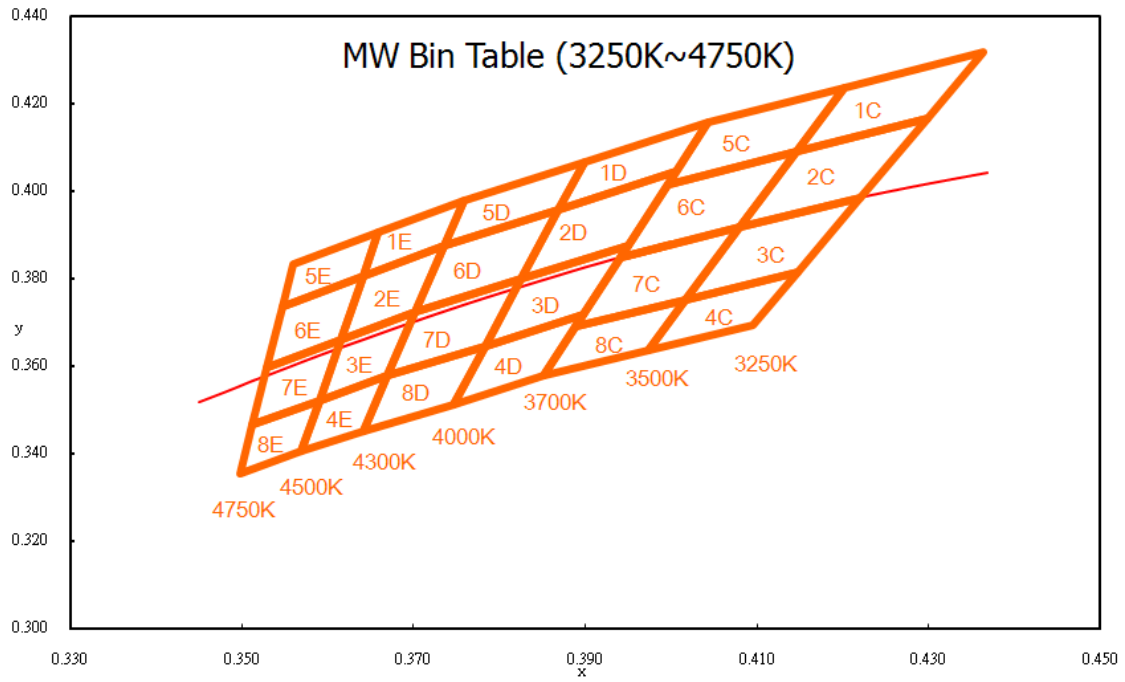

**LUSTRON DX3**

<sup>®</sup>  
**LUSTROUS**  
*GREEN TECHNOLOGY OF LIGHTING*

Table.9

Natural White Bin Table												
CCT (K)			BIN CODE	Chromaticity Coordinate (CIE 1931-xy)								
Min	Typ.	Max		x1	y1	x2	y2	x3	y3	x4	y4	
3250	3500	3700	C	1C	0.4146	0.4089	0.4202	0.4235	0.4364	0.4316	0.4299	0.4165
				2C	0.4080	0.3916	0.4146	0.4089	0.4299	0.4165	0.4221	0.3984
				3C	0.4017	0.3751	0.4080	0.3916	0.4221	0.3984	0.4147	0.3814
				4C	0.3973	0.3635	0.4017	0.3751	0.4147	0.3814	0.4095	0.3694
				5C	0.3996	0.4015	0.4043	0.4157	0.4202	0.4235	0.4146	0.4089
				6C	0.3941	0.3848	0.3996	0.4015	0.4146	0.4089	0.4080	0.3916
				7C	0.3889	0.3690	0.3941	0.3848	0.4080	0.3916	0.4017	0.3751
				8C	0.3852	0.3578	0.3889	0.3690	0.4017	0.3751	0.3973	0.3635
3700	4000	4300	D	1D	0.3869	0.3958	0.3899	0.4066	0.4043	0.4157	0.4006	0.4044
				2D	0.3825	0.3798	0.3869	0.3958	0.4006	0.4044	0.3950	0.3875
				3D	0.3783	0.3646	0.3825	0.3798	0.3950	0.3875	0.3898	0.3716
				4D	0.3746	0.3513	0.3783	0.3646	0.3898	0.3716	0.3852	0.3578
				5D	0.3736	0.3874	0.3759	0.3978	0.3899	0.4066	0.3869	0.3958
				6D	0.3702	0.3722	0.3736	0.3874	0.3869	0.3958	0.3825	0.3798
				7D	0.3670	0.3578	0.3702	0.3722	0.3825	0.3798	0.3783	0.3646
				8D	0.3642	0.3450	0.3670	0.3578	0.3783	0.3646	0.3746	0.3513
4300	4500	4750	E	1E	0.3641	0.3804	0.3659	0.3904	0.3759	0.3978	0.3736	0.3874
				2E	0.3615	0.3659	0.3641	0.3804	0.3736	0.3874	0.3702	0.3722
				3E	0.3590	0.3521	0.3615	0.3659	0.3702	0.3722	0.3670	0.3578
				4E	0.3569	0.3407	0.3590	0.3521	0.3670	0.3578	0.3642	0.3450
				5E	0.3548	0.3736	0.3560	0.3832	0.3659	0.3904	0.3641	0.3804

**LUSTRON DX3**

---

**LUSTROUS<sup>®</sup>**

*GREEN TECHNOLOGY OF LIGHTING*


				6E	0.3529	0.3597	0.3548	0.3736	0.3641	0.3804	0.3615	0.3659
				7E	0.3512	0.3465	0.3529	0.3597	0.3615	0.3659	0.3590	0.3521
				8E	0.3498	0.3355	0.3512	0.3465	0.3590	0.3521	0.3569	0.3407

---

**LUSTRON DX3**

**Cool White**

NW Bin Table (4750K~10000K)

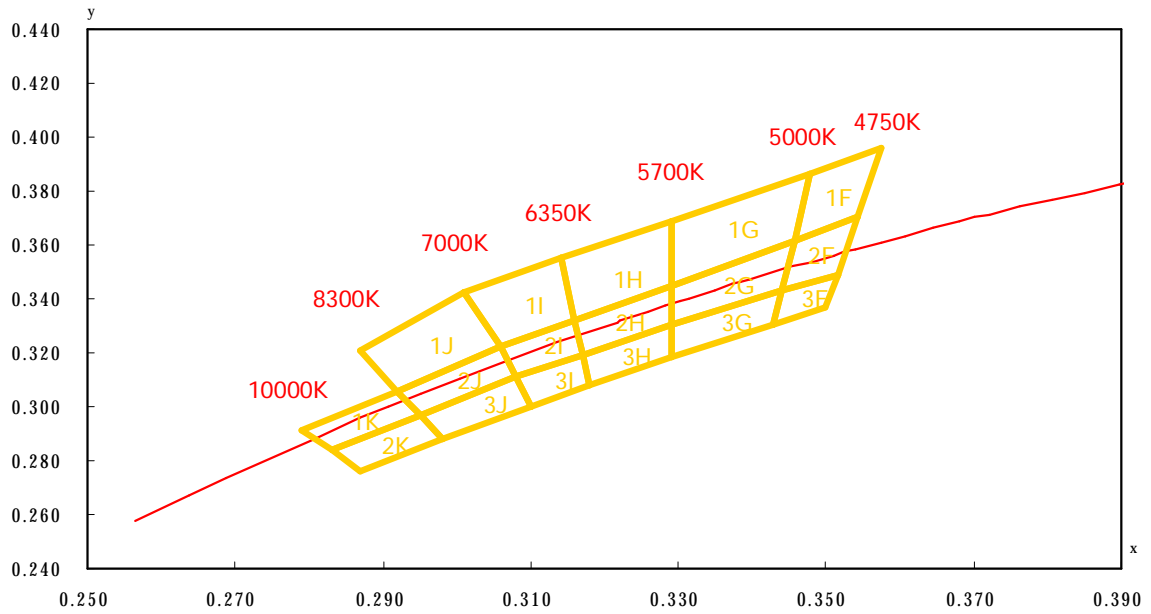

**LUSTRON DX3**

<sup>®</sup>  
**LUSTROUS**  
*GREEN TECHNOLOGY OF LIGHTING*

Table.10

Cool White Bin Table												
CCT (K)			BIN CODE	Chromaticity Coordinate (CIE 1931-xy)								
Min	Typ.	Max		x1	y1	x2	y2	x3	y3	x4	y4	
4750	4850	5000	F	1F	0.3479	0.3867	0.3457	0.3617	0.3544	0.3704	0.3576	0.3957
				2F	0.3457	0.3617	0.3440	0.3429	0.3515	0.3487	0.3544	0.3704
				3F	0.3440	0.3429	0.3429	0.3307	0.3500	0.3371	0.3515	0.3487
5000	5300	5700	G	1G	0.3290	0.3690	0.3290	0.3450	0.3457	0.3617	0.3479	0.3867
				2G	0.3457	0.3617	0.3440	0.3429	0.3290	0.3300	0.3290	0.3450
				3G	0.3290	0.3300	0.3290	0.3180	0.3429	0.3307	0.3440	0.3429
5700	6000	6350	H	1H	0.3290	0.3690	0.3290	0.3450	0.3160	0.3320	0.3140	0.3550
				2H	0.3290	0.3450	0.3290	0.3300	0.3170	0.3190	0.3160	0.3320
				3H	0.3170	0.3190	0.3290	0.3300	0.3290	0.3180	0.3180	0.3080
6350	6500	7000	I	1I	0.3140	0.3550	0.3160	0.3320	0.3060	0.3220	0.3010	0.3420
				2I	0.3160	0.3320	0.3170	0.3190	0.3080	0.3110	0.3060	0.3220
				3I	0.3080	0.3110	0.3170	0.3190	0.3180	0.3080	0.3100	0.3000
7000	7650	8300	J	1J	0.3010	0.3420	0.3060	0.3220	0.2920	0.3060	0.2870	0.3210
				2J	0.3060	0.3220	0.3080	0.3110	0.2950	0.2970	0.2920	0.3060
				3J	0.2950	0.2970	0.3080	0.3110	0.3100	0.3000	0.2980	0.2880
8300	9000	10000	K	1K	0.2920	0.3060	0.2950	0.2970	0.2830	0.2840	0.2790	0.2910
				2K	0.2830	0.2840	0.2950	0.2970	0.2980	0.2880	0.2870	0.2760

**LUSTRON DX3**

**LUSTROUS**<sup>®</sup>  
GREEN TECHNOLOGY OF LIGHTING

**Print Code Guideline**

L3   20   NW   H   W   D   A  
 1      2      3      4      5      6      7  
XXXXXXXXXXXXXXXXXX  
 8  
V0   -W   -2H   XX   XX   XX  
 9      10      11      12      13      14

Table.11

1 Type	2 Power	3 Color	4 Vf	5 Current	6 CRI
<b>L3</b>	<b>20</b> : 20W	<b>NW</b> : Cool White <b>MW</b> : Neutral White <b>CL</b> : Warm White	<b>D</b> : 14 V <b>H</b> : 28 V	<b>W</b> : 750 mA <b>Y</b> : 1500 mA	<b>B</b> : 80~90 <b>C</b> : 70~80 <b>D</b> : 60~70


7 Customer Code	8 Internal Code	9 Bin Vf	10 Luminous Flux	11 Chromaticity
		<b>V0</b> : Without Binned	See Bin Code Definition	See Bin Code Definition

12 Year	13 Month	14 Week
<b>09</b> : 2009	<b>01</b> : January	<b>01</b> : 01 <sup>st</sup> Week
<b>10</b> : 2010	<b>05</b> : May	<b>20</b> : 20 <sup>th</sup> Week
<b>11</b> : 2011	<b>10</b> : October	<b>45</b> : 45 <sup>th</sup> Week

**LUSTRON DX3**

**LUSTROUS**<sup>®</sup>  
GREEN TECHNOLOGY OF LIGHTING

**Standard Packaging**

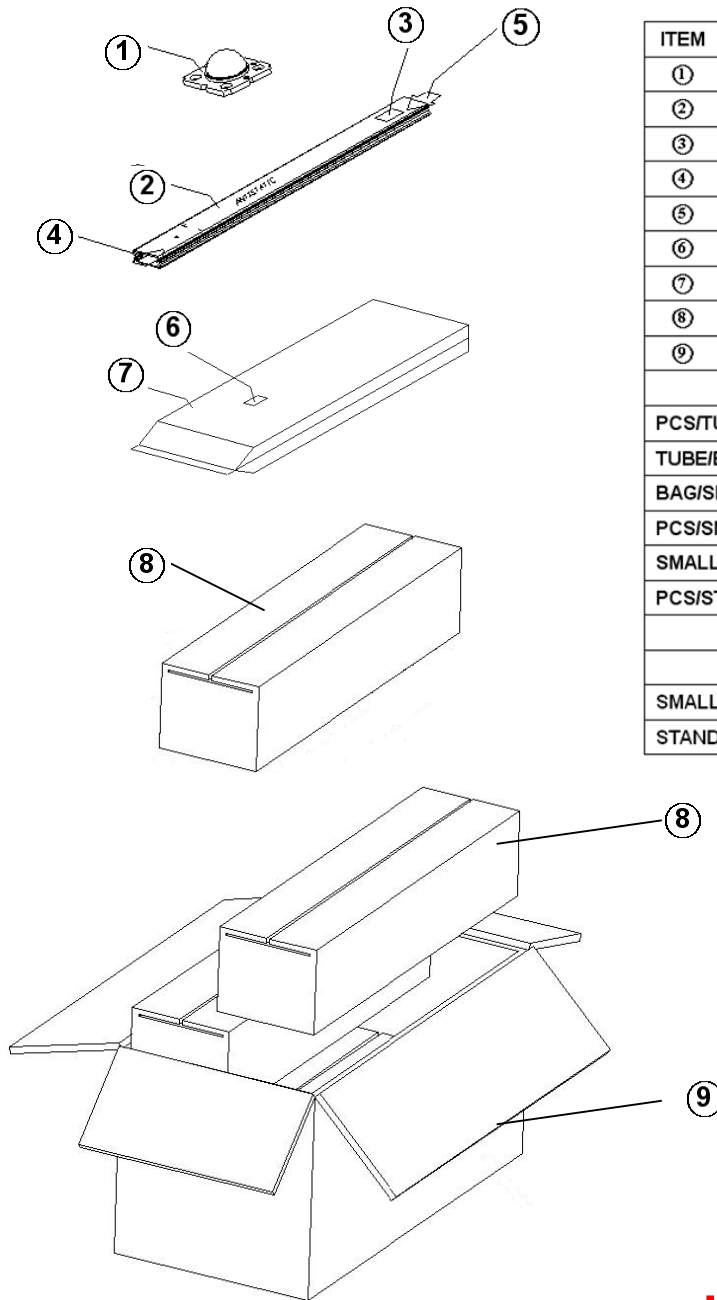

ITEM	DESCRIPTION	
①	LED	
②	PLASTIC TUBE	
③	ADHESIVE MAIN LABEL	
④	END-PLUG WHITE	
⑤	END-PLUG BLACK	
⑥	ADHESIVE MAIN LABEL	
⑦	MOISTURE BARRIER BAG	
⑧	SMALL BOX	
⑨	STANDARD BOX	
STACKING METHOD		
PCS/TUBE		10
TUBE/BAG		10
BAG/SMALL BOX		2
PCS/SMALL BOX		200
SMALL BOX/STANDARD BOX		4
PCS/STANDARD BOX		800
SIZE AND WEIGHT		
	SIZE(mm <sup>3</sup> )	WEIGHT(kg)
SMALL BOX	560x130x130	3.7±0.5
STANDARD BOX	580x280x280	15.5±0.5

**LUSTRON DX3**

## Precaution for Use

### Over-current Proof

1. Do not reverse current the LEDs we suggest current limit resistors for extra protection.
2. The maximum overshoot current should be limited to 130% of normal drive current.
3. The ripple of driving current should not exceed +/-10% of normal driving current.
4. The typical driving current for L320NWHWDA series is 750mA and 1500mA for L320NWDYDA series.
5. When driving L320NWHWDA and L320NWDYDA series, the clamp voltage must be set at 30V and 15V, respectively.

### Storage

1. Do not open the Moisture Barrier Bag (MBB) before you are ready to install the LEDs.
2. Storage Condition ( before opening the MBB ) :
  - I Storage Temperature:-20~50°C.
  - I Relative Humidity: <60% RH.
  - I Please re-seal the MBB when storing longer than 3 weeks.
  - I The products should be used within half a year.
3. Storage Condition ( after opening the MBB ) :
  - I Storage Temperature:-20~50°C.
  - I Relative Humidity: <60% RH.
  - I The products should used or installed as soon as possible after opening the MBB. Otherwise, the LED product must be baked at 80+/-5°C, 24 hours before installation.

### Installation

Do not touch the lighting surface area during installation.



## Company Information

Founded in 2004, Lustrous Technology endeavors to bring in a new era of Solid-State Lighting (SSL). In order to promote innovative new designs and maintain superior quality we have located our R&D and production facilities in Taiwan. Our commitment to excellence has helped us earn quality awards and unique patents in many countries, such as Taiwan and US. Our finest LED lighting products are designed to provide the best in performance and reliability for your next LED applications. Besides high power LED products, our professional and experienced R&D team also provides excellent secondary optical services for customers to solve any lens problems. After years of accomplishment, we have successfully established long-term and trustful worthy business relationships with several most prestigious corporations, such as Delta Electronics, Inc. and Neng Tyi Co., Ltd. If your company is considering any Lustrous products, feel free to contact our sales personnel for a brief introduction or arrange a tour of our ISO 9000 facility in Taiwan.

\*\*Lustrous Technology may make process and material changes affecting performance and characteristics of our products without further notice. These products supplied after changes will continue to meet published specifications, but may not be identical to products supplied as samples or under prior orders.



**LUSTROUS TECHNOLOGY LTD**  
Green Technology of Lightings

**Website:** [www.LUSTROUS.com.tw](http://www.LUSTROUS.com.tw)  
**Email:** [sales@lustrous.com.tw](mailto:sales@lustrous.com.tw)  
**Tel:** +886-2-8647-2862  
**Fax:** +886-2-8647-2863  
**Address:** 5F, No 212-1, Sec.3, Datong Rd, Shiji City, Taipei County 221,  
Taiwan

All rights reserved. Product specifications are subject to change without further notice.

**LUSTRON DX3**

---