

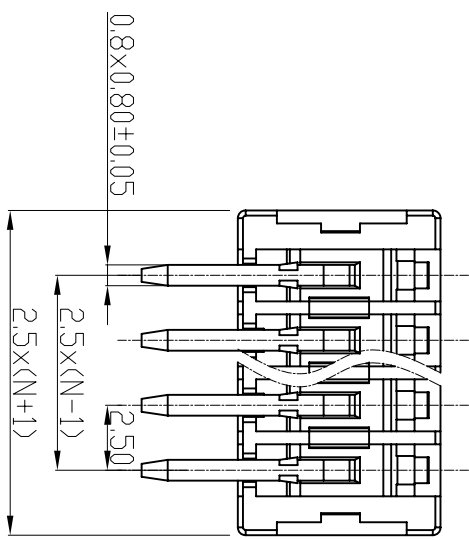




REV	ECN	DESCRIPTION	DRFT	DATE


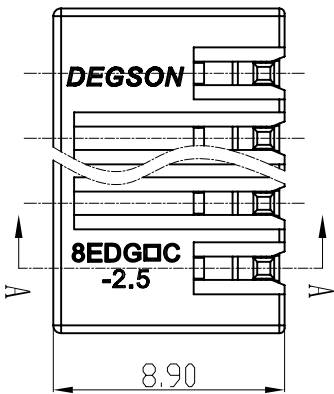


- Notes:
1. Pitch: 2.50mm, 2-12P;
 2. Rated voltage/current: UL 150V 4A
IEC 250V 4A
 3. Operation temperatures: -40°C~+105°C
 4. Withstanding Voltage: AC2000V/1min
 5. Insulation Resistance: 5000M Ω /DC1000V
 6. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm					
	over	to	over	to	over	to
6 to 10	6	10	30	60	100	150
10 to 24	10	24	30	60	100	150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7
0.05/10	±1	±1	±1	±1	±1	±1

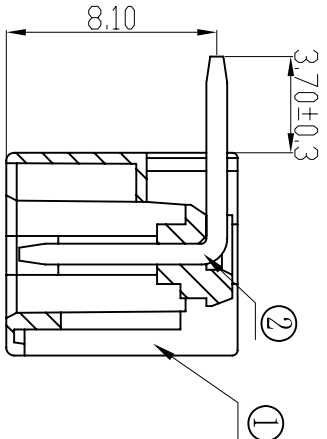

SECTION A-A

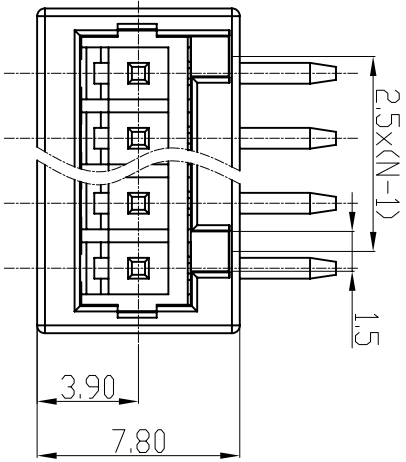

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	8EDGRC-2.5 Header	1128B00020 (H)	XX	Brass	SnCe
2	8EDGRC-2.5 Housing	1128A01YXA (H)	1	PA66	UL94V-0

DETAILED LISTS		NAME	
MM	INCH	DEGSON	宁波高正电子有限公司
0.1 ±	±	DEGSON	DEGSON ELECTRONICS CO., LTD
0.05 ±	±		
0.02 ±	±		
0.01 ±	±		

THIRD ANGLE PROJECTION		SCALE : 1:1	
DATE	07/20/10	DRAWING NO.	8EDGRC-2.5-E02
CHKD	DATE	/PART NO.	
APPRV	DATE	DD NOT SCALE DRAWING	
MATERIAL :		SIZE	A4
G.E :		REV	10
FINISH :		DATE	07/20/10
SCALE : 1:1		SHEET	1 of 1