


# A13-150

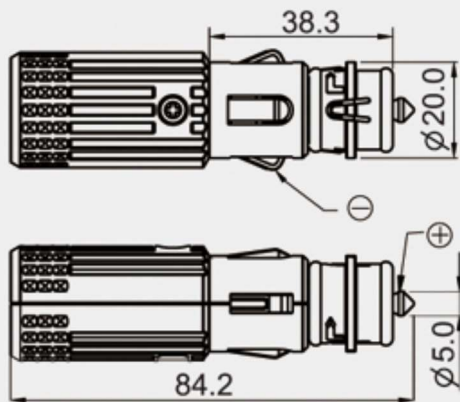

## FEATURES

- \* RATING: 16A 12V/24V DC Multi-Voltage.
- \* MATERIAL
  - Housing: ABS ( UL 94-HB ) for A&B.
  - Nylon with glass fiber ( UL 94-HB ) for C&D.
  - Top contact : nickel plated metal.
  - Spring contact: nickel plated spring steel.
- \* Heavy duty lighter plug.
- \* With integrated, exchangeable fuses of 1A-15A charge, 12-24V DC.
- \* With screwed terminals for cables up to 16AWG max.
- \* Adapter can be firmly positioned by a bayonet catch.
- \* A13-150A: Without LED indicator, without fuse.
- \* A13-150B: LED indicator, without fuse.
- \* A13-150C: 15A fuse, without LED indicator.
- \* A13-150D: LED indicator, 1~15A fuse.