

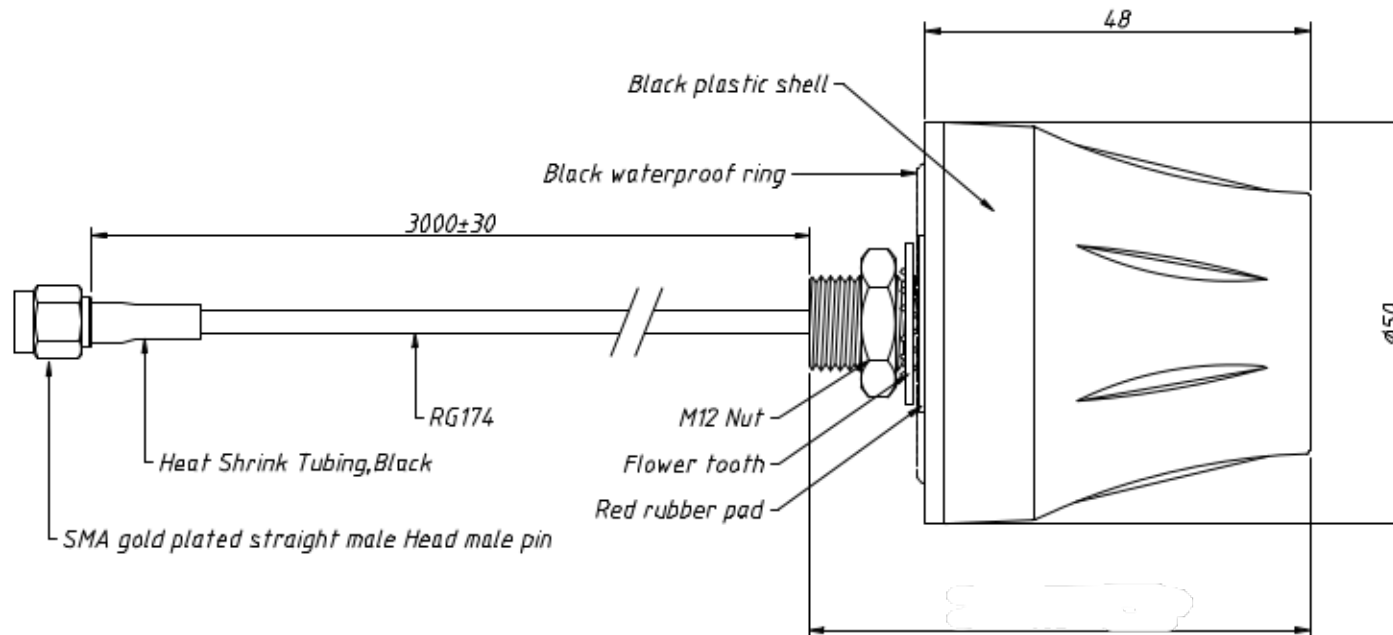


REV	SYM	Revision Record	Appr.	Date
V0	KL517048	New Version Release	Sang	2025-06-13

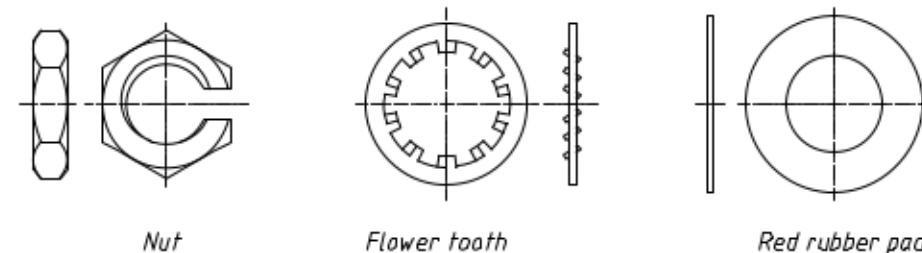

Frequency Range:824-1990MHz
 Band Width:1166MHz
 VSWR:≤2.0
 Gain:-3DBi
 Impedance:50 Ω
 Polarization:Vertical
 Radiation:OMNIDIRECTIONAL
 Max power:10 W
 Temperature:-35℃~+80℃

The Assembly Of Each Component Should Be Firm And Reliable
 The Signal Parameters Of The Finished Product Must Reach
 The Specified Value
 The Product Needs To Be Packaged In Quantity According To
 The Requirements, And There Should Be No Obvious Signs
 During Transportation Phenomena Such As Compression
 Deformation

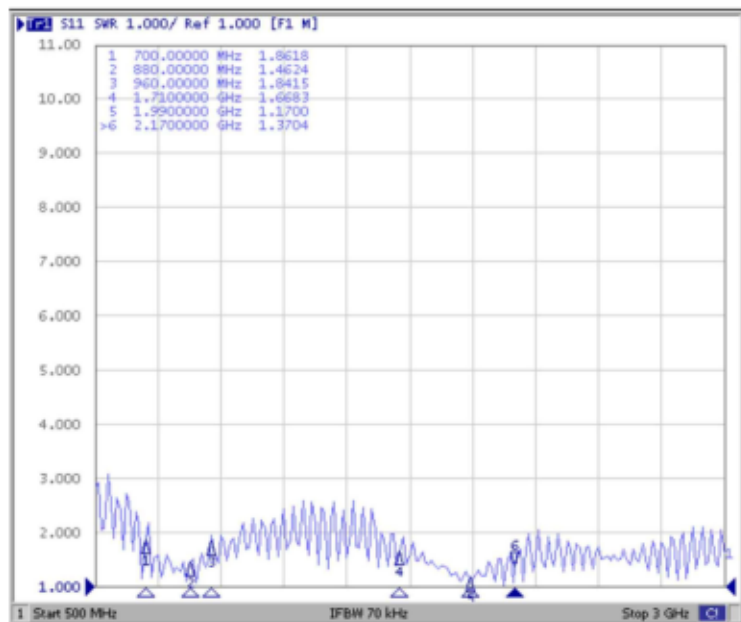

ANGLE TOLERANCE	PROJECTION		Description:	
±3°			3G/4G Antenna	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-GSM/GPRS-ZD72
x.x ±0.30	SHEET SIZE	A4		 NingBo KLS ELECTRONIC CO.,L TD.
x.xx ±0.20	Draw:	Song	2025-06-13	
x.xxx ±0.10	Check:	Daniel	2025-06-13	