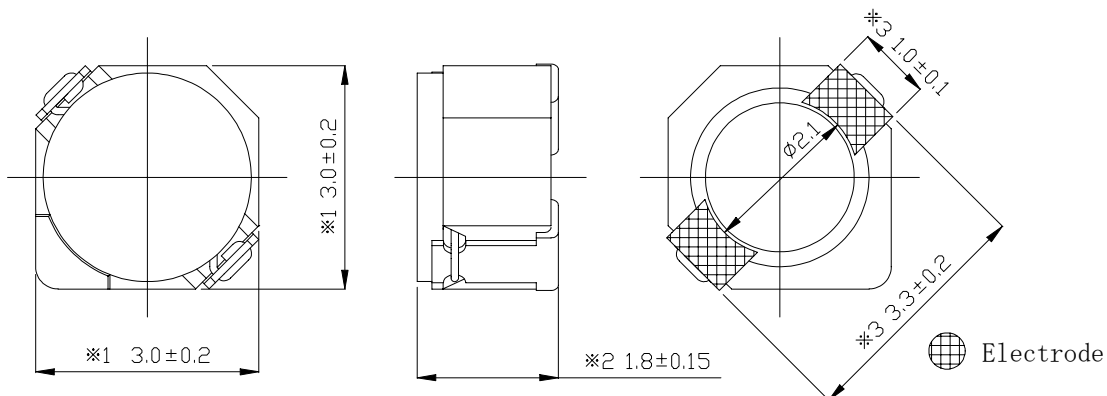
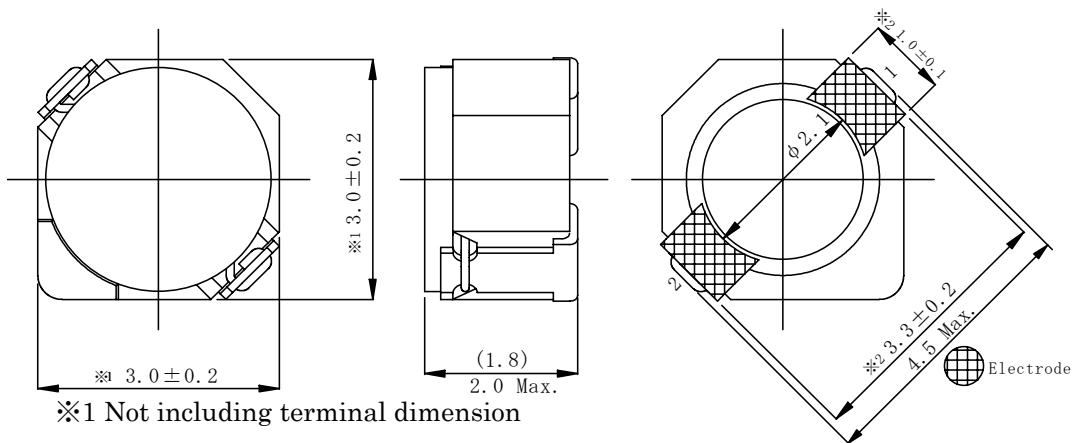



Type: CDRH2D18B/HP, CDRH2D18/HP, CDRH2D18/LD
◆ Product Description

- 3.2×3.2mm Max.(L×W) for the three types.
- 1.95mm Max.Height(CDRH2D18B/HP), 2.0mm Max.Height(CDRH2D18/HP&CDRH2D18/LD).
- CDRH2D18B/HP has a better stability in high(2MHz) and low(100KHz) frequency range
- Inductance range: 1.3~22 μ H(CDRH2D18B/HP), 2.2~47 μ H(CDRH2D18/LD);0.2~15 μ H(CDRH2D18/HP),
- Rated current range:0.45~1.80A(CDRH2D18B/HP), 0.2~0.85A (CDRH2D18/LD);0.64~4.7A (CDRH2D18/HP).
- In addition to the standards versions shown here, custom inductors are also available to meet your exact requirements.


◆ Feature

- Magnetically shielded construction.
- Ideally used in Mobilephone,PDA,MP3,DSC/DVC,Portable DVD,etc as DC-DC Converter inductors.
- RoHS Compliance.

◆ Dimensions (mm)

CDRH2D18B/HP

CDRH2D18/HP CDRH2D18/LD

Type: CDRH2D18B/HP, CDRH2D18/HP, CDRH2D18/LD
◆ Land Pattern (mm)

◆ Specification(CDRH2D18B/HP)

Part Name ※	Stamp	Inductance (μ H) [Within] 100kHz/1V	D.C.R.m Ω) Max.(Typ.) (at 20°C)	Saturation current (A)※1		Temperature rise current (A)※2
				(at 20°C)	(at100°C)	
CDRH2D18B/HPNP-1R3N□	A	1.3 \pm 25%	66(53)	2.20	1.80	1.80
CDRH2D18B/HPNP-2R2N□	C	2.2 \pm 25%	88(70)	1.70	1.50	1.48
CDRH2D18B/HPNP-3R3N□	E	3.3 \pm 25%	103(82)	1.32	1.10	1.30
CDRH2D18B/HPNP-4R7N□	G	4.7 \pm 25%	163(130)	1.20	1.05	1.00
CDRH2D18B/HPNP-6R8N□	I	6.8 \pm 25%	241(193)	1.05	0.90	0.80
CDRH2D18B/HPNP-1 \emptyset 0M□	K	10 \pm 20%	306(245)	0.88	0.76	0.70
CDRH2D18B/HPNP-15 \emptyset M□	M	15 \pm 20%	536(429)	0.70	0.60	0.48
CDRH2D18B/HPNP-22 \emptyset M□	P	22 \pm 20%	658(526)	0.58	0.50	0.45

◆ Specification(CDRH2D18/LD)

Part Name ※	Stamp	Inductance (μ H) [Within] 100kHz/1V	D.C.R. (m Ω) Max.(Typ.) (at 20°C)	Saturation current (A)※1		Temperature rise current (A)※2
				(at 20°C)	(at100°C)	
CDRH2D18/LDNP-2R2N□	C	2.2 \pm 30%	41(33)	0.85	0.67	2.30
CDRH2D18/LDNP-3R3N□	E	3.3 \pm 30%	54(43)	0.75	0.55	2.10
CDRH2D18/LDNP-4R7N□	G	4.7 \pm 30%	78(62)	0.63	0.47	1.65
CDRH2D18/LDNP-6R8N□	I	6.8 \pm 30%	106(85)	0.52	0.40	1.32
CDRH2D18/LDNP-1 \emptyset 0N□	K	10 \pm 30%	180(145)	0.43	0.33	1.00
CDRH2D18/LDNP-15 \emptyset N□	M	15 \pm 30%	220(175)	0.35	0.28	0.80
CDRH2D18/LDNP-22 \emptyset N□	O	22 \pm 30%	320(255)	0.30	0.22	0.68
CDRH2D18/LDNP-33 \emptyset N□	Q	33 \pm 30%	460(370)	0.24	0.18	0.56
CDRH2D18/LDNP-47 \emptyset N□	S	47 \pm 30%	660(530)	0.20	0.15	0.48

Type: CDRH2D18B/HP, CDRH2D18/HP, CDRH2D18/LD
◆ Specification(CDRH2D18/HP)

Part Name ※	Stamp	Inductance [Within] (μ H) ※3	D.C.R. (m Ω) Max.(Typ.) (at 20°C)	Saturation current (A)※1		Temperature rise current (A)※2
				(at 20°C)	(at100°C)	
CDRH2D18/HP-R2ØN□	N	0.20±35%	22(17)	5.35	3.55	4.70
CDRH2D18/HP-R36N□	P	0.36±35%	29(22)	4.62	3.00	4.10
CDRH2D18/HP-R56N□	Q	0.56±35%	33(25)	3.75	2.76	3.60
CDRH2D18/HP-R82N□	R	0.82±35%	39(30)	2.91	2.20	3.30
CDRH2D18/HP-1R1N□	S	1.10±35%	43(33)	2.50	1.90	2.90
CDRH2D18/HP-1R7N□	A	1.70±30%	44(35)	1.85	1.36	2.20
CDRH2D18/HP-2R2N□	C	2.20±30%	60(48)	1.60	1.15	1.90
CDRH2D18/HP-3R3N□	E	3.30±30%	86(69)	1.45	1.10	1.55
CDRH2D18/HP-4R7N□	G	4.70±30%	140(110)	1.20	0.90	1.20
CDRH2D18/HP-6R3N□	I	6.30±30%	160(128)	1.05	0.78	1.15
CDRH2D18/HP-1ØØN□	K	10.0±30%	245(195)	0.85	0.65	0.90
CDRH2D18/HP-15ØN□	M	15.0±30%	345(275)	0.70	0.53	0.64

※ Description of part name

CDRH2D18/HP-R2ØN□

- B Box
- C Carrier Tape

※1.Saturation Current: The DC current at which the inductance decreases to 65% of it's nominal value

 ※2 Temperature rise current: The DC current at which the temperature rise is $\Delta t=40^{\circ}\text{C}$.($T_a=20^{\circ}\text{C}$)

 ※3 Measuring frequency 0.20 μ H~1.10 μ H at 7.96MHz
 1.70 μ H~15.0 μ H at 100kHz