


**Smallest sealed snap-action switch in the industry with a very long stroke for reliable ON/OFF action.**

- The case dimensions are 78% of conventional models, contributing to down-sizing of mechanical modules.
- Extra-long stroke even without levers. (OT: 1.4 mm)
- Made of environment-friendly materials. All models are lead-free, including molded lead wire models.

RoHS Compliant

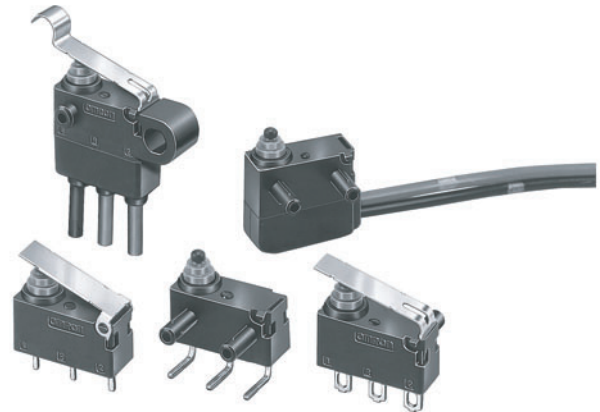

## Ordering Information

### ■ Model Number Legend:

D2HW-□□□□□  
1 2 3 4 5

#### 1. Mounting Structure

- A: Without posts (base-mounting)
- BR: Posts on right
- BL: Posts on left
- C: M3-screw mounting

#### 2. Ratings

- 2: 1 mA at 5 VDC to 2 A at 12 VDC

#### 3. Actuator

- 0: Pin plunger
- 1: Hinge lever
- 2: Long hinge lever
- 3: Simulated roller hinge lever
- 4: Hinge roller lever
- 6: Leaf lever
- 7: Simulated roller leaf lever
- 8: Long leaf lever

#### 4. Contact Form

- 1: SPDT
- 2: SPST-NC (Molded lead wire models only.)
- 3: SPST-NO (Molded lead wire models only.)








#### 5. Terminals

- D: Straight PCB terminals
- DR: Right-angled PCB terminals
- DL: Left-angled PCB terminals
- H: Solder terminals
- M: Molded lead wires downwards
- MR: Molded lead wires on right-side
- ML: Molded lead wires on left-side

**Note** Add "S" to the end of the model number for the UL/CSA-approved version.







## ■ List of Models

### PCB-mounted Models

Actuator	Terminals		Contact form	Model		
				With posts on right 	With posts on left 	Without posts 
Pin plunger 	For PCB	Straight	SPDT	---	---	D2HW-A201D
		Angled		D2HW-BR201DR	D2HW-BL201DL	---
Hinge lever 		Straight		---	---	D2HW-A211D
		Angled		D2HW-BR211DR	D2HW-BL211DL	---
Long hinge lever 		Straight		---	---	D2HW-A221D
		Angled		D2HW-BR221DR	D2HW-BL221DL	---
Simulated roller hinge lever 		Straight		---	---	D2HW-A231D
		Angled		D2HW-BR231DR	D2HW-BL231DL	---









**Note** Add "S" to the end of the model number for the UL/CSA-approved version. Consult your OMRON sales representative for details.

### Models with Solder Terminals or Molded Lead Wires

Actuator	Terminals		Contact form	Model				
				With posts on right 	With posts on left 	M3-screw mounting 		
Pin plunger 	Solder		SPDT	D2HW-BR201H	D2HW-BL201H	D2HW-C201H		
	Molded lead wires	Downwards	SPDT	D2HW-BR201M	D2HW-BL201M	D2HW-C201M		
			SPST-NC	D2HW-BR202M	D2HW-BL202M	D2HW-C202M		
			SPST-NO	D2HW-BR203M	D2HW-BL203M	D2HW-C203M		
			SPST-NC	D2HW-BR202MR	D2HW-BL202MR	D2HW-C202MR		
		Right-side	SPST-NO	D2HW-BR203MR	D2HW-BL203MR	D2HW-C203MR		
			SPST-NC	D2HW-BR202ML	D2HW-BL202ML	---		
	Left-side	SPST-NO	D2HW-BR203ML	D2HW-BL203ML	---			
Solder		SPDT	D2HW-BR211H	D2HW-BL211H	D2HW-C211H			
Hinge lever 	Molded lead wires	Downwards	SPDT	D2HW-BR211M	D2HW-BL211M	D2HW-C211M		
			SPST-NC	D2HW-BR212M	D2HW-BL212M	D2HW-C212M		
			SPST-NO	D2HW-BR213M	D2HW-BL213M	D2HW-C213M		
			SPST-NC	D2HW-BR212MR	D2HW-BL212MR	D2HW-C212MR		
			SPST-NO	D2HW-BR213MR	D2HW-BL213MR	D2HW-C213MR		
			Right-side	SPST-NC	D2HW-BR212ML	D2HW-BL212ML	---	
		SPST-NO		D2HW-BR213ML	D2HW-BL213ML	---		
		Long hinge lever 	Solder		SPDT	D2HW-BR221H	D2HW-BL221H	D2HW-C221H
			Molded lead wires	Downwards	SPDT	D2HW-BR221M	D2HW-BL221M	D2HW-C221M
					SPST-NC	D2HW-BR222M	D2HW-BL222M	D2HW-C222M
SPST-NO	D2HW-BR223M				D2HW-BL223M	D2HW-C223M		
SPST-NC	D2HW-BR222MR				D2HW-BL222MR	D2HW-C222MR		
SPST-NO	D2HW-BR223MR				D2HW-BL223MR	D2HW-C223MR		
Right-side	SPST-NC				D2HW-BR222ML	D2HW-BL222ML	---	
	SPST-NO			D2HW-BR223ML	D2HW-BL223ML	---		

**Note:** 1. The length of standard lead wires (AVSS0.5) for molded lead wire models is 30 cm.

2. Add "S" to the end of the model number for the UL/CSA-approved version. Consult your OMRON sales representative for details.

Actuator	Terminals		Contact form	Model			
				With posts on right 	With posts on left 	M3-screw mounting 	
<b>Simulated roller hinge lever</b> 	Solder		SPDT	D2HW-BR231H	D2HW-BL231H	D2HW-C231H	
	Molded lead wires	Downwards	SPDT	D2HW-BR231M	D2HW-BL231M	D2HW-C231M	
			SPST-NC	D2HW-BR232M	D2HW-BL232M	D2HW-C232M	
			SPST-NO	D2HW-BR233M	D2HW-BL233M	D2HW-C233M	
			SPST-NC	D2HW-BR232MR	D2HW-BL232MR	D2HW-C232MR	
		Right-side	SPST-NO	D2HW-BR233MR	D2HW-BL233MR	D2HW-C233MR	
			SPST-NC	D2HW-BR232ML	D2HW-BL232ML	---	
	Left-side	SPST-NO	D2HW-BR233ML	D2HW-BL233ML	---		
SPST-NC		D2HW-BR232ML	D2HW-BL232ML	---			
<b>Hinge roller lever</b> 	Solder		SPDT	D2HW-BR241H	D2HW-BL241H	D2HW-C241H	
	Molded lead wires	Downwards	SPDT	D2HW-BR241M	D2HW-BL241M	D2HW-C241M	
			SPST-NC	D2HW-BR242M	D2HW-BL242M	D2HW-C242M	
			SPST-NO	D2HW-BR243M	D2HW-BL243M	D2HW-C243M	
			SPST-NC	D2HW-BR242MR	D2HW-BL242MR	D2HW-C242MR	
			SPST-NO	D2HW-BR243MR	D2HW-BL243MR	D2HW-C243MR	
			SPST-NC	D2HW-BR242ML	D2HW-BL242ML	---	
		Right-side	SPST-NO	D2HW-BR243ML	D2HW-BL243ML	---	
			SPST-NC	D2HW-BR242MR	D2HW-BL242MR	D2HW-C242MR	
			SPST-NO	D2HW-BR243MR	D2HW-BL243MR	D2HW-C243MR	
			SPST-NC	D2HW-BR242ML	D2HW-BL242ML	---	
	Left-side	SPST-NO	D2HW-BR243ML	D2HW-BL243ML	---		
SPST-NC		D2HW-BR242ML	D2HW-BL242ML	---			
<b>Leaf lever</b> 	Solder		SPDT	D2HW-BR261H	D2HW-BL261H	D2HW-C261H	
	Molded lead wires	Downwards	SPDT	D2HW-BR261M	D2HW-BL261M	D2HW-C261M	
			SPST-NC	D2HW-BR262M	D2HW-BL262M	D2HW-C262M	
			SPST-NO	D2HW-BR263M	D2HW-BL263M	D2HW-C263M	
			SPST-NC	D2HW-BR262MR	D2HW-BL262MR	D2HW-C262MR	
			SPST-NO	D2HW-BR263MR	D2HW-BL263MR	D2HW-C263MR	
			SPST-NC	D2HW-BR262ML	D2HW-BL262ML	---	
		Right-side	SPST-NO	D2HW-BR263ML	D2HW-BL263ML	---	
			SPST-NC	D2HW-BR262MR	D2HW-BL262MR	D2HW-C262MR	
			SPST-NO	D2HW-BR263MR	D2HW-BL263MR	D2HW-C263MR	
			SPST-NC	D2HW-BR262ML	D2HW-BL262ML	---	
	Left-side	SPST-NO	D2HW-BR263ML	D2HW-BL263ML	---		
SPST-NC		D2HW-BR262ML	D2HW-BL262ML	---			
<b>Simulated roller leaf lever</b> 	Solder		SPDT	D2HW-BR271H	D2HW-BL271H	D2HW-C271H	
	Molded lead wires	Downwards	SPDT	D2HW-BR271M	D2HW-BL271M	D2HW-C271M	
			SPST-NC	D2HW-BR272M	D2HW-BL272M	D2HW-C272M	
			SPST-NO	D2HW-BR273M	D2HW-BL273M	D2HW-C273M	
			SPST-NC	D2HW-BR272MR	D2HW-BL272MR	D2HW-C272MR	
			SPST-NO	D2HW-BR273MR	D2HW-BL273MR	D2HW-C273MR	
			SPST-NC	D2HW-BR272ML	D2HW-BL272ML	---	
		Right-side	SPST-NO	D2HW-BR273ML	D2HW-BL273ML	---	
			SPST-NC	D2HW-BR272MR	D2HW-BL272MR	D2HW-C272MR	
			SPST-NO	D2HW-BR273MR	D2HW-BL273MR	D2HW-C273MR	
			SPST-NC	D2HW-BR272ML	D2HW-BL272ML	---	
	Left-side	SPST-NO	D2HW-BR273ML	D2HW-BL273ML	---		
SPST-NC		D2HW-BR272ML	D2HW-BL272ML	---			
<b>Long leaf lever</b> 	Molded lead wires	Downwards	SPDT	D2HW-BR281M	D2HW-BL281M	D2HW-C281M	
			SPST-NC	D2HW-BR282M	D2HW-BL282M	D2HW-C282M	
			SPST-NO	D2HW-BR283M	D2HW-BL283M	D2HW-C283M	
			SPST-NC	---	---	D2HW-C282MR	
			Right-side	SPST-NO	---	---	D2HW-C283MR
				SPST-NC	---	---	D2HW-C283MR

**Note:** 1. The length of standard lead wires (AVSS 0.5) for molded lead wire models is 30 cm.

2. Add "S" to the end of the model number for the UL/CSA-approved version. Consult your OMRON sales representative for details.

## Specifications

### ■ Ratings

Rated voltage (V)	Resistive load
125 VAC	0.1 A
12 VDC	2 A
24 VDC	1 A
42 VDC	0.5 A

**Note** The ratings values apply under the following test conditions:

Ambient temperature: 20±2°C

Ambient humidity: 65±5%

Operating frequency: 30 operations/min

■ Characteristics

Item	Specification
Operating speed	1 mm to 500 mm/s (for pin plunger models)
Operating frequency	30 operations/min max.
Insulation resistance	100 MΩ min. (at 500 VDC)
Contact resistance (initial value)	100 mΩ max. (molded lead wire models: 150 mΩ max.)
Dielectric strength	600 VAC, 50/60 Hz for 1 min between terminals of the same polarity 1,500 VAC, 50/60 Hz for 1 min between current-carrying metal parts and ground, and between each terminal and non-current-carrying metal parts
Vibration resistance (see note 2)	Malfunction: 10 to 55 Hz, 1.5-mm double amplitude
Shock resistance (see note 2)	Destruction: 1,000 m/s <sup>2</sup> {approx. 100 G} max. Malfunction: 300 m/s <sup>2</sup> {approx. 30 G} max.
Durability (see note 3)	Mechanical: 1,000,000 operations min. (30 operations/min) Electrical: 100,000 operations min. (20 operations/min)
Degree of protection	IEC IP67 (excluding the terminals on terminal models)
Degree of protection against electric shock	Class I
Proof tracking index (PTI)	175
Ambient operating temperature	-40 to 85°C (at ambient humidity of 60% max.) (with no icing or condensation)
Ambient operating humidity	95% max. (for 5 to 35°C)
Weight	Approx. 0.7 g (for pin plunger models with terminals)

- Note:**
- The data given above are initial values.
  - For the pin plunger models, the above values apply for use at the free position, operating position, and total travel position. For the lever models, they apply at the total travel position. The values shown apply for malfunctions of 1 ms max.
  - For testing conditions, consult your OMRON sales representative.

■ Approved Standards

Consult your OMRON sales representative for specific models with standard approvals.

**UL1054 (File No. E41515)/CSA C22.2 No. 55 (UL approval)**

Rated voltage	D2HW
125 VAC	0.1 A
12 VDC	2 A


■ Contact Specifications

Item	Specification	
Contact	Specification	Crossbar
	Material	Gold alloy
	Gap (standard value)	0.5 mm
Minimum applicable load (see note)	1 mA at 5 VDC	


**Note:** Minimum applicable loads are indicated by N standard reference values. This value represents the failure rate at a 60% ( $\lambda_{60}$ ) reliability level. The equation  $\lambda_{60}=035 \times 10^{-6} / \text{operations}$  indicates that a failure rate of 1/2,000,000 operations can be expected at a reliability level of 60%.

■ Contact Form


SPDT



SPST-NC (Molded Lead Wire Models Only)



SPST-NO (Molded Lead Wire Models Only)



**Note** Molded lead wire colors are indicated in parentheses.


# Dimensions

## ■ Mounting Structure and Reference Positions for Operating Characteristics


**Note** All units are in millimeters unless otherwise indicated.

The reference positions used for FP, OP, and TTP values are as shown below for each type of mounting.


### Models without Posts D2HW-A□





### Models with Posts D2HW-B□

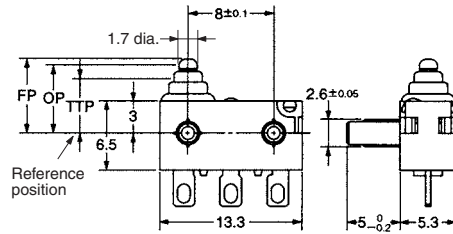

### M3-screw Mounting Models D2HW-C□

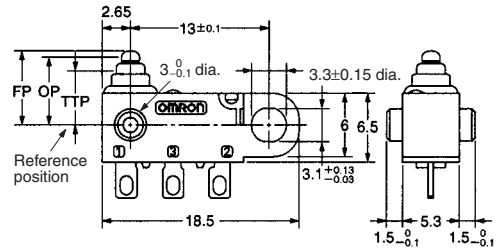


### Mounting Hole Dimensions (Reference)

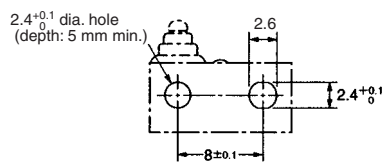


## ■ Terminals


### Straight PCB Terminals




### PCB Cutout Dimensions (Reference)




### Angled PCB Terminals

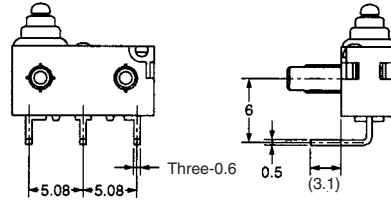


### PCB Cutout Dimensions (Reference)

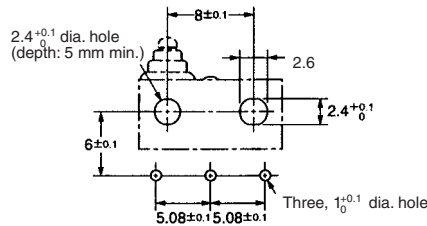


### Solder Terminals

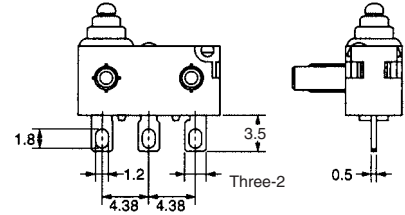


### Molded Lead Wires Downwards

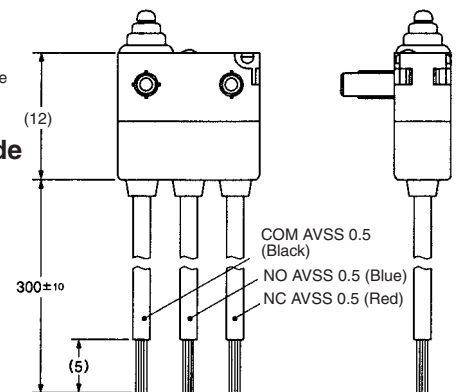

### Molded Lead Wires on Left-side

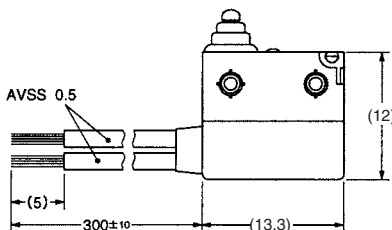

### Molded Lead Wires on Right-side

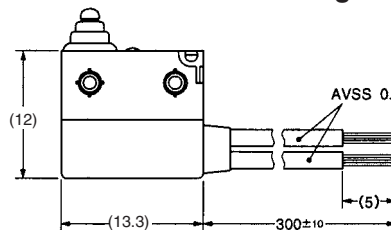


### ■ Dimensions and Operating Characteristics

- Note:**
1. All units are in millimeters unless otherwise indicated.
  2. Dimensions not indicated in the above diagrams have a tolerance of  $\pm 0.2$  mm.
  3. The operating characteristics are for operation in the A direction (  $\downarrow$  ).

#### Pin Plunger Models


D2HW-□20□□

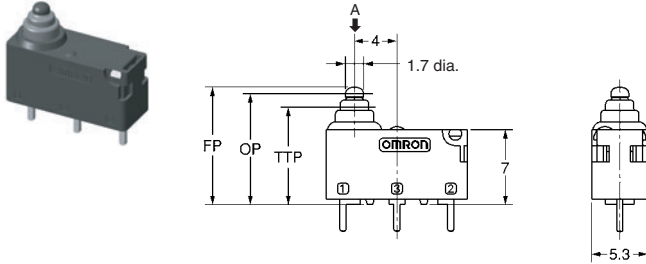

Model	Models without posts	Models with posts and M3-mounting models
<b>OF max.</b>	0.75 N {76 gf}	
<b>RF min.</b>	0.10 N {10 gf}	
<b>OT ref.</b>	1.4 mm (reference value)	
<b>MD max.</b>	0.25 mm	
<b>FP max.</b>	11.2 mm	7.2 mm
<b>OP</b>	10.4 $\pm$ 0.2 mm	6.4 $\pm$ 0.2 mm
<b>TTP max.</b>	9.1 mm	5.1 mm

#### Hinge Lever Models


D2HW-□21□□

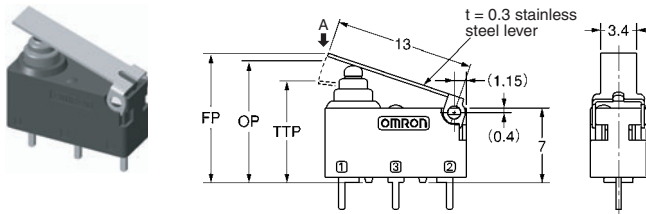

Model	Models without posts	Models with posts and M3-mounting models
<b>OF max.</b>	0.75 N {76 gf}	
<b>RF min.</b>	0.07 N {7 gf}	
<b>OT ref.</b>	1.6 mm (reference value)	
<b>MD max.</b>	0.5 mm	
<b>FP max.</b>	12.8 mm	8.8 mm
<b>OP</b>	11.5 $\pm$ 0.5 mm	7.5 $\pm$ 0.5 mm
<b>TTP max.</b>	10 mm	6 mm

#### Long Hinge Lever Models


D2HW-□22□□

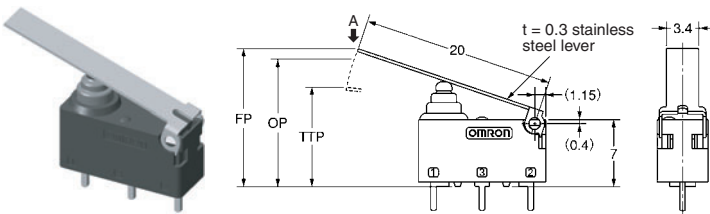

Model	Models without posts	Models with posts and M3-mounting models
<b>OF max.</b>	0.5 N {50 gf}	
<b>RF min.</b>	0.03 N {3 gf}	
<b>OT ref.</b>	2.5 mm (reference value)	
<b>MD max.</b>	0.8 mm	
<b>FP max.</b>	15.5 mm	11.5 mm
<b>OP</b>	13.3 $\pm$ 0.8 mm	9.3 $\pm$ 0.8 mm
<b>TTP max.</b>	11 mm	7 mm

#### Simulated Roller Hinge Lever Models


D2HW-□23□□

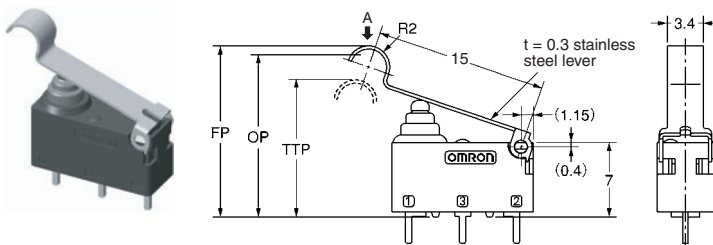

Model	Models without posts	Models with posts and M3-mounting models
<b>OF max.</b>	0.65 N {66 gf}	
<b>RF min.</b>	0.05 N {5 gf}	
<b>OT ref.</b>	1.9 mm (reference value)	
<b>MD max.</b>	0.5 mm	
<b>FP max.</b>	16.5 mm	12.5 mm
<b>OP</b>	15.2 $\pm$ 0.5 mm	11.2 $\pm$ 0.5 mm
<b>TTP max.</b>	13.5 mm	9.5 mm

**Hinge Roller Lever Models**


D2HW-□24□□

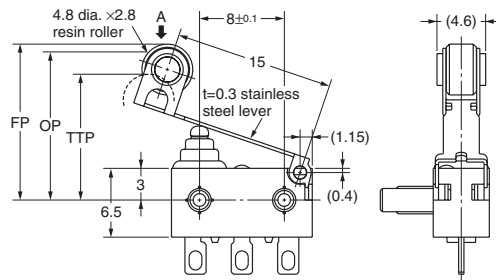

Model	Models with posts and M3-mounting models
OF max.	0.65 N {66 gf}
RF min.	0.03 N {3 gf}
OT ref.	1.9 mm (reference value)
MD max.	0.6 mm
FP max.	15.3 mm
OP	14±0.6 mm
TTP max.	12.3 mm

**Leaf Lever Models**


D2HW-□26□□

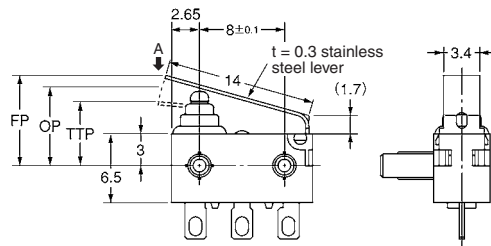

Model	Models with posts and M3-mounting models
OF max.	1.8 N {183 gf}
RF min.	0.20 N {20 gf}
OT ref.	1.8 mm (reference value)
MD max.	0.5 mm
FP max.	9.3 mm
OP	7.4±0.5 mm
TTP max.	5.8 mm

**Simulated Roller Leaf Lever Models**


D2HW-□27□□

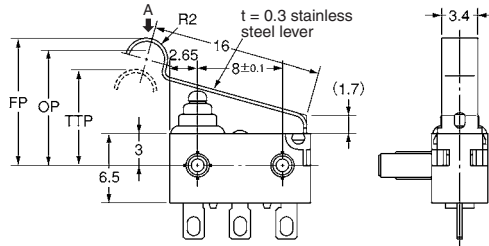

Model	Models with posts and M3-mounting models
OF max.	1.8 N {183 gf}
RF min.	0.20 N {20 gf}
OT ref.	2.0 mm (reference value)
MD max.	0.5 mm
FP max.	13 mm
OP	10.8±0.5 mm
TTP max.	8.9 mm

**Long Leaf Lever Models**

D2HW-□28□□

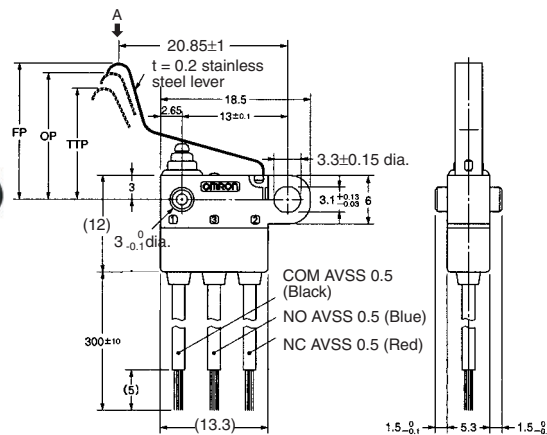

Model	Models with posts and M3-mounting models
OF max.	0.9 N {92 gf}
RF min.	0.05 N {5 gf}
OT ref.	2.8 mm (reference value)
MD max.	0.7 mm
FP max.	19 mm
OP	15.4±1.5 mm
TTP max.	12.8 mm

# Precautions

Refer to *General Information*.

## ■ Cautions

### Degree of Protection

Do not use this product in water. Although molded lead wire models satisfy the test conditions for the standard given below, this test is to check the ingress of water into the switch enclosure after submerging the Switch in water for a given time. Satisfying this test condition does not mean that the Switch can be used in water.

IEC Publication 529, degree of protection IP67.

Do not operate the Switch when it is exposed to water spray, or when water drops adhere to the Switch surface, or during sudden temperature changes, otherwise water may intrude into the interior of the Switch due to a suction effect.

Prevent the Switch from coming into contact with oil and chemicals. Otherwise, damage to or deterioration of Switch materials may result.

Do not use the Switch in areas where it is exposed to silicon adhesives, oil, or grease, otherwise faulty contact may result due to the generation of silicon oxide.

### Terminal Connection

When soldering the lead wire to the terminal, first insert the lead wire conductor through the terminal hole and then conduct soldering.

The rough standard for soldering work is as follows:

Capacity of soldering iron: 50 W Max (300 °C at the iron tip)

Soldering time: 3 seconds max.

Not applying any external force for 1 minute after soldering.

Applying only the minimum required amount of flux. It can cause a contact failure if flux enters the switch.

Improper soldering involving an excessively high temperature or excessive soldering time may deteriorate the characteristics of the Switch.

In case of automatic soldering, please do not apply the heat beyond 260 °C within 5 seconds.

Pay careful attention so that flux or solder liquid does not exceed the PCB panel.

### Side-actuated (Cam/Dog) Operation

When using a cam or dog to operate the Switch, factors such as the operating speed, operating frequency, push-button indentation, and material and shape of the cam or dog will affect the durability of the Switch. Confirm performance specifications under actual operation conditions before using the Switch in applications.

## ■ Correct Use

### Mounting

Turn OFF the power supply before mounting or removing the Switch, wiring, or performing maintenance or inspection. Failure to do so may result in electric shock or burning.

For M3-screw mounting models, use M3 mounting screws with plane washers or spring washers to securely mount the Switch. Tighten the screws to a torque of 0.27 to 0.29 N·m. Exceeding the specified torque may result in deterioration of the sealing or damage.

For models with posts, secure the posts by thermal caulking or by pressing into an attached device. When pressed into an attached device, provide guides on the opposite ends of the posts to ensure that they do not fall out or rattle.

Mount the Switch onto a flat surface. Mounting on an uneven surface may cause deformation of the Switch, resulting in faulty operation or damage.


### Operating Body

Use an operating body with low frictional resistance and of a shape that will not interfere with the sealing rubber, otherwise the plunger may be damaged or the sealing may deteriorate.

### Handling

Do not handle the Switch in a way that may cause damage to the sealing rubber.

When handling the Switch, ensure that pressure is not applied to the posts in the directions shown in the following diagram. Also, ensure that uneven pressure or pressure in a direction other than the operating direction is not applied to the Actuator as shown in the following diagram. Otherwise, the post, Actuator, or Switch may be damaged, or the service life may be reduced.



### Wiring Molded Lead Wire Models

When wiring molded lead wire models, ensure that there is no weight on the wire or that there are no sharp bends near the parts where the wire is drawn out. Otherwise, damage to the Switch or deterioration in the sealing may result.

### Using Micro Loads

Even when using micro load models within the operating range, inrush currents or surges may decrease the life expectancy of the Switch. Therefore, insert a contact protection circuit where necessary.

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.