
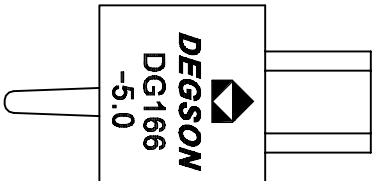
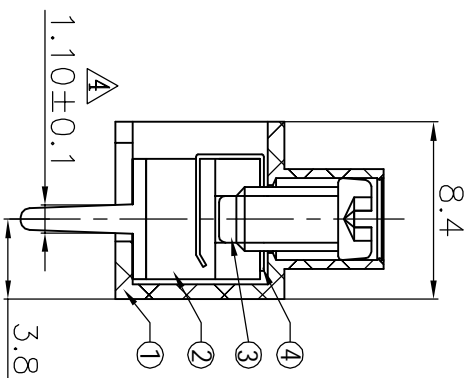
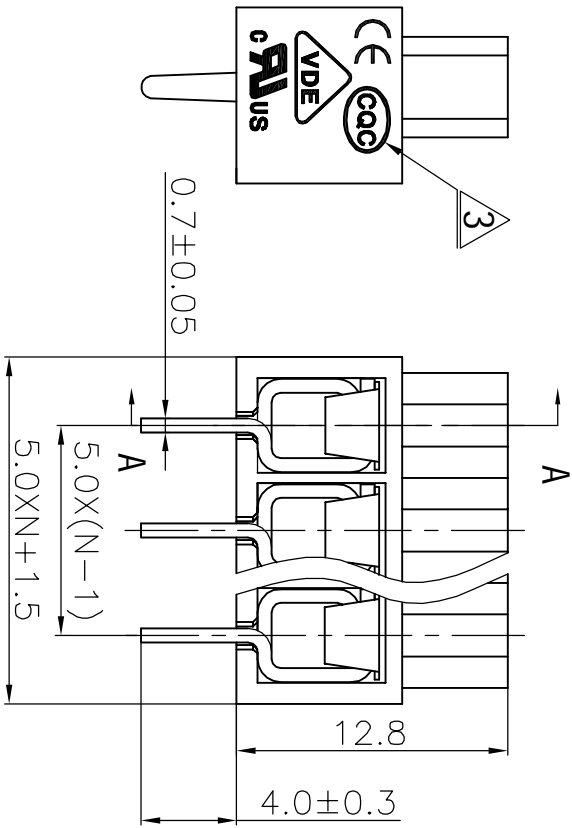


REV	ECO	DESCRIPTION	DRT	DATE
1		Drawing Revise	Haoyh	08/03/06
2		增加U1刻字	CSX	06/26/07
3		增加VDE、CE刻字	LJH	12/26/07
4		修改尺寸及公差	LJH	07/08/08
5		出脚尺寸由4.2修改为4.0	WLM	08/06/08
6		材料改为不锈钢	YHG	11/14/08

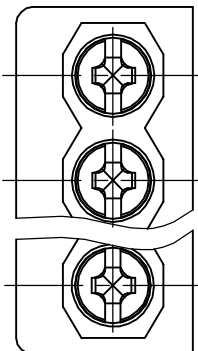

Notes:

- Pitch: 5.0mm , Poles: 2-12P
- Rated voltage/current: UL 300V/15A VDE 250V/22A
- Operation temperatures: -40℃~+105℃
- Withstanding Voltage: AC2000V/1Min
- Insulation Resistance: 5000MΩ /DC1000V
- Wire Range: 12~22AWG, 2.5mm²
- Max. Torque Value: M3.0, 5.10kgf.cm
- Undimensioned Tolerances:

Pitch range in mm	Nominal dimension in mm	over	over	over	over	over	over
6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150 to 200	200 to 250	250 to 300
±0.10	±0.15	±0.25	±0.3	±0.5	±0.7	±1.0	±0.05/10

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
4	DG166-Spring	X000000210(H)	XX	stainless steel	
3	DG166-Screws-M3	S0000001660(H)	XX	Steel	Cr ³⁺ Zn
2	DG166-Pin header	4021B00010(H)	XX	Brass	SnCe
1	DG166-Housing	4021A0YXXA(H)	1	PA66	UL94V-0

DETACHED LISTS	
ANGLES ± 1°	FINISH :
THIRD ANGLE PROJECTION	SCALE : 1:1

宁波德正电子有限公司
 DEGSON® DEGSON ELECTRONICS CO., LTD
 NAME: DG166-5.0-XXP-1Y-00A(H)
 DRAWING NO. DG166-5.0-E03
 /PART NO.
 DO NOT SCALE DRAWING
 SHEET 1 OF 1