D1RFRD006

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

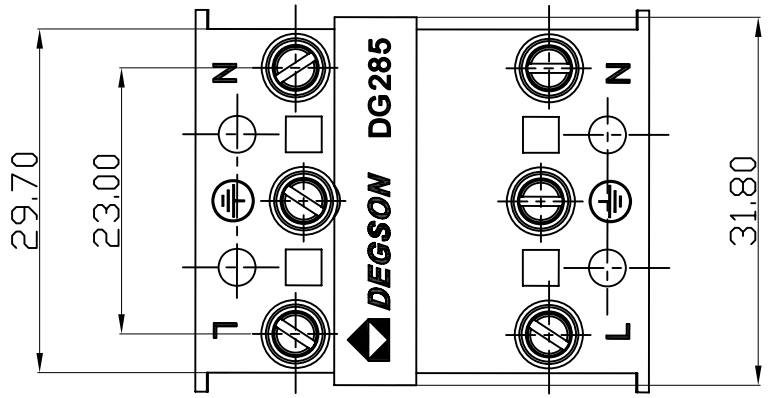

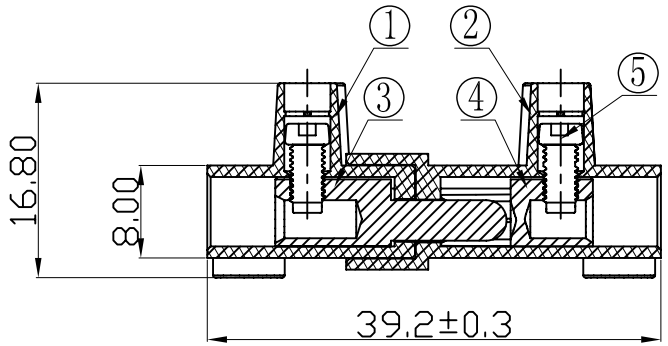

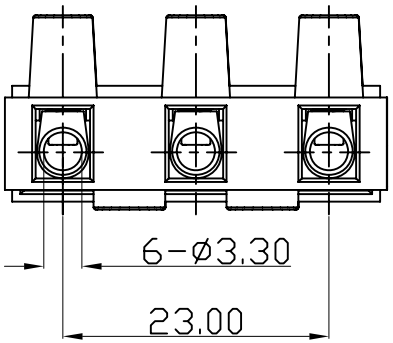

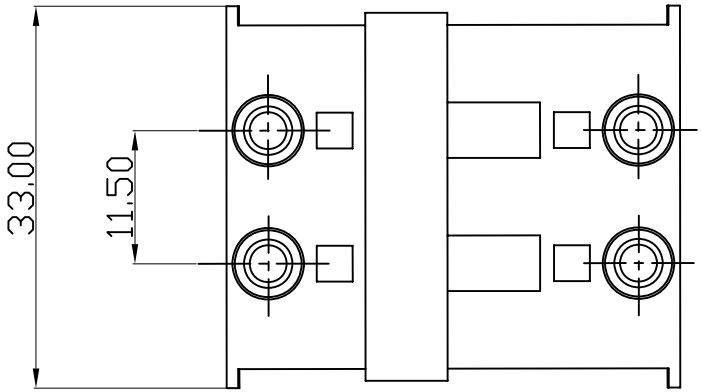

Notes:

1. Pitch:11.5mm, Poles:3P;
2. Rated voltage/Current:UL1059:300/16A;
   IEC:400V/24A;
3. Temp.Range : -40° C～+105° C;
4. Wire range: 18-12AWG;2.5mm²;
5. Max torque value:5.10kgf.cm
6. insertion and pull-out force:insertion 8N-13N/P;Pull-out:2N-6N/P;
7. Insulation resistance:5000MΩ/1000V
8. Undimensioned Tolerances:

Pitch range in mm			Naminal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒ / ▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
5	DG129″—″M3 Screw	S000001430(H)	XX*2	Steel	$Cr^{3+}Zn$
4	DG280K Socket	X000004620(H)	XX	Brass	Ni plated
3	DG280J Plug	X000004610(H)	XX	Brass	Ni plated
2	DG285 Housing Two	2086A0Y03A(H)	1	PA66	UL94V-2
1	DG285 Housing One	2086A0Y03C(H)	1	PA66	UL94V-2

DETACHED LISTS

MM (INCH)

TOLERANCES EXCEPT AS NOTED

MM
.0 ±
.00 ±
.000 ±

ANGLES ± 1°

THIRD ANGLE PROJECTION

DFTD Mickey	DATE 06/20/09'	
CHKD	DATE	
MFD	DATE	
APPVL	DATE	
MATERIAL :		
G.E :		
FINISH:		
SCALE :		

DEGSON®
宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME
DG285-03P-1Y-00A(H)

DRAWING NO. DG285-E01
/PART NO.

SIZE A4

REV T0 01/25/10'

DO NOT SCALE DRAWING

SHEET 1 OF 1

8 7 6 5 4 3 2 1

H G F E D C B A