




Quartz Crystal

HC-49/U3H (low profile)

part no.	12.84236
model	KX - 3HT
frequency	4,91520 MHz
holder type	HC-49/U3H
mode	fundamental
operating temperature	-40° ~ +85°C
frequency tolerance at +25°C	±30 ppm
temperature tolerance at 40° ~ +85°C	±100 ppm
load capacitance C_L	16 pF
series resistance R_1 (ESR) max.	100 Ohm
aging at +25°C (first year) max.	±5 ppm
shunt capacitance C_0 max.	7 pF
drive level max.	0.1 mW
contents of standard package	200 pcs.per bag / 2000 pcs. per box (10 bags)

Dimensions (mm):

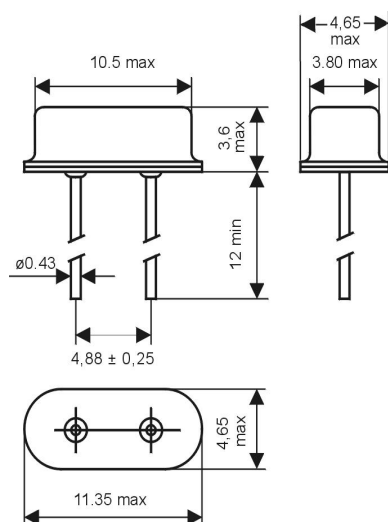

Wave soldering condition:

