


Model:	LP103454LC		Overcharge Detection Voltage(V) 过充保护电压 (V)	4.28±0.05
Battery pack specification 电池组规格	Min.Capacity 最低容量(mAh) (0.2C,25±3°C) ※Single cell capacity (单体电芯容量)	1900	Overdischarge Detection Voltage(V) 过放保护电压 (V)	3.0±0.1
	Typical Capacity 典型容量(mAh) (0.2C,25±3°C) ※Single cell capacity (单体电芯容量)	2000	Limited to Max loading current 仅用于最大的负载电流 peak value (A) constant (A) 峰值 2 (A) 持续 1 (A)	
	Nominal Voltage 标称电压(V)	3.7	Customer required Max loading current 客户要求最大的负载电流 peak value (A) constant (A) 峰值 (A) 持续 (A)	
	Internal impedance 内阻(≦) (mΩ, AC 1KHZ)	170		
Ambient Conditions (环境温度)	Charge Temp. 充电温度(°C)	0~45	If actual application loading current is bigger than EEMB suggested, please indicate. The application profile is important for an appropriate PCM design. (如果实际应用的负载电流大于EEMB提供值, 请提出来. 实际的应用情况对PCM的设计至关重要)	
	Discharge Temp. 放电温度(°C)	-40~45		
	Humidity(湿度)	65±20%		

Battery protection Related Value:
(相关的电池保护值)

Remark(备注):
1. No scratch, distortion, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).
2. RoHS compliant(严格按照ROHS要求生产).

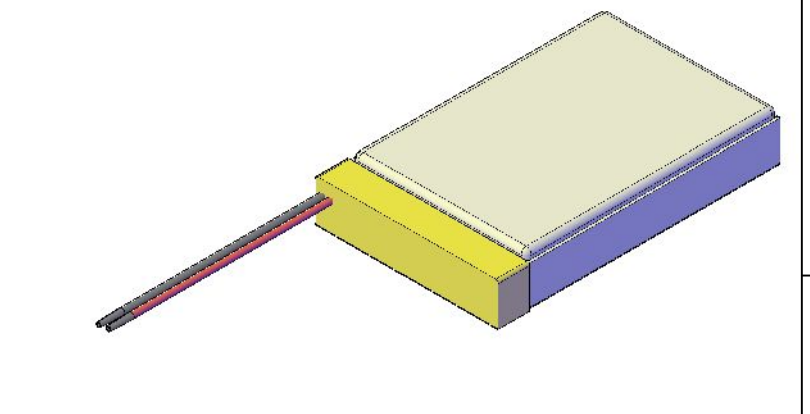

		Drawn:	Leiyuanhao	Revise No.:	E4-2009
		Checked 1:	Rachel	Projection:	
Title LP103454LC-PCM-LD File NO. A11074		Checked 2:		Page:	1/1
		Approved:		Scale:	1 : 1
		Draw Date:	2015/03/30	Unit:	mm