



Switch

Standard Vertical Push Switch Series


KLS7-P5.8X5.8 Standard Vertical Push Switch Series

ELECTRICAL

- Rating :DC30V 0.1A
- Insulation Resistance :>100MΩ DC125V
- Withstand Voltage :AC 125V 1 minute
- Contact Resistance :<100mΩ
- Soldering Temper :250°C max.3sec
- Mechanical Life :100,000 cycles
- Electrical Life :10,000 cycles
- Ambient Temper.Used :-25°C to +65°C
- Ambient Humidity Used :<85% RH
- Operating force :150±80 gf

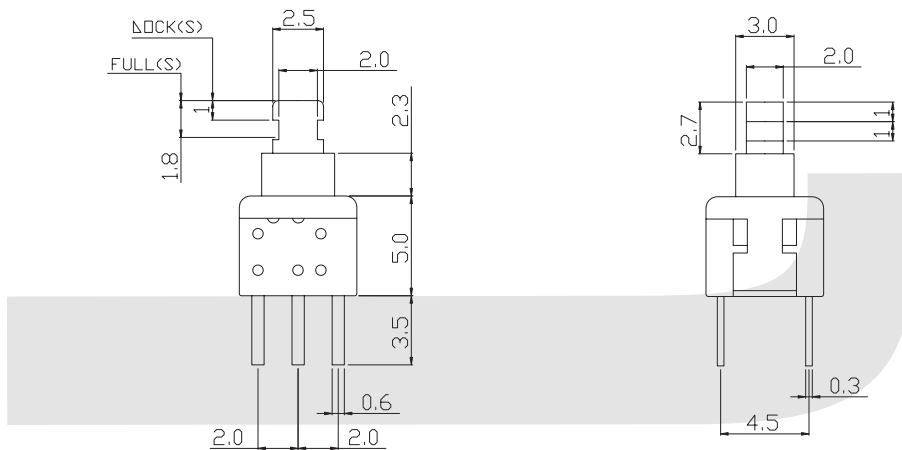

SCHEMATIC



ORDER INFORMATION

KLS7-P5.8x5.8 X
 Part Number —————
 Standard Vertical Push Switch Series ———— 0=Non Lock 1=lock