




## Cable Assemblies

KLS17-UCP-08 USB 2.0 CableSeries

1. Cable:UL 2725 28AWG/1P+2C+AL+B  
OD:4.5mm Black Jacket
2. Connector:USB-A Male
3. Connector:Mini USB-5Pin Male
- 4.Tooling:#0034
- 5.Tooling:#0038
- 6.Black PVC-55P

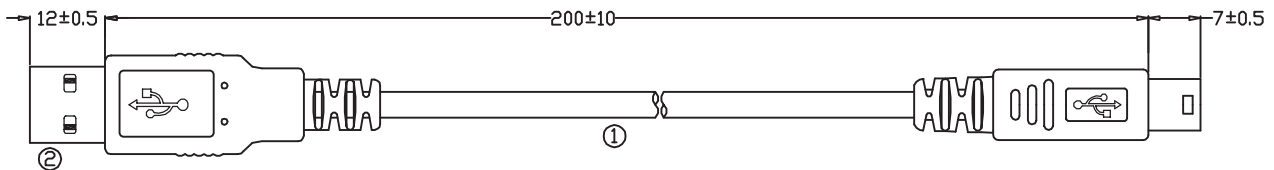

USB-A MALE  
④ Tooling:#0034  
⑥ Black PVC-55P



MINI USB-5Pin MALE  
④ Tooling:#0038  
⑥ Black PVC-55P

Pin Out

USB-A MALE (P1)	MINI USB-5Pin MALE (P2)	Wire Color
1	1	RED(红) VBUS
2	2	WHITE(白) D-
3	3	GREEN(绿) D+
4	5	BLACK(黑) ID
SHELL	SHELL	SHIELD(编织)

## ORDER INFORMATION

Product NO.: KLS17-UCP-08-2.0-0.2M-B-28.24AWG

Part Number	USB port USB 2.0	Long 0.2M	Wire gauge 28AWG/1P+24AWG/2C
-------------	---------------------	--------------	---------------------------------

**UL2651 Flat Cable Series**

Code No.	Number of Cores	Size of conductor		Thic kness (mm±0.05)	Width (mm)	Allowable error (mm)
		AWG	Composition (solid/mm)			
FC-09	9	28	7/0.127	0.9	11.43	± 0.30
FC-10	10	28	7/0.127	0.9	12.7	± 0.30
FC-14	14	28	7/0.127	0.9	17.78	± 0.30
FC-15	15	28	7/0.127	0.9	19.05	± 0.30
FC-16	16	28	7/0.127	0.9	20.32	± 0.30
FC-20	20	28	7/0.127	0.9	25.4	± 0.30
FC-25	25	28	7/0.127	0.9	31.75	± 0.30
FC-26	26	28	7/0.127	0.9	33.02	± 0.30
FC-30	30	28	7/0.127	0.9	38.1	± 0.30
FC-34	34	28	7/0.127	0.9	43.18	± 0.40
FC-36	36	28	7/0.127	0.9	45.72	± 0.40
FC-40	40	28	7/0.127	0.9	50.8	± 0.40
FC-50	50	28	7/0.127	0.9	63.5	± 0.40
FC-60	60	28	7/0.127	0.9	76.2	± 0.40
FC-64	64	28	7/0.127	0.9	81.28	± 0.40

**ORDER INFORMATION**

Product NO.: KLS17-127-FC-XX - 1

