



#### Features:

- Wide input range 180~480VAC
- · Built-in active PFC function
- High efficiency up to 91%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- · Cooling by free air convection
- · OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (0~10Vdc or 10V PWM signal or resistance)
- · Suitable for LED lighting and street lighting applications
- · Compliance to worldwide safety regulations for lighting
- · Suitable for dry / damp / wet locations
- 5 years warranty (Note.8)









HVG-100-15 A

A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.

B: IP67 rated. Constant current level adjustable through output cable with 0~10Vdc or 10V PWM signal or resistance.


D (option): IP67 rated. Timer dimming function, contact MEAN WELL for details.

#### **SPECIFICATION**


MODEL		HVG-100-15	HVG-100-20	HVG-100-24	HVG-100-30	HVG-100-36	HVG-100-42	HVG-100-48	HVG-100-54				
	DC VOLTAGE	15V	20V	24V	30V	36V	42V	48V	54V				
ОИТРИТ	RATED CURRENT	5A	4.8A	4A	3.2A	2.65A	2.28A	2A	1.77A				
	RATED POWER	75W	96W	96W	96W	95.4W	95.76W	96W	95.58W				
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p				
	VOLTAGE ADJ. RANGE Note.5	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V				
	OUDDENT AD L DANGE	Can be adjusted by internal potentiometer or through output cable											
	CURRENT ADJ. RANGE	2.5 ~ 5A	2.4 ~ 4.8A	2~4A	1.6 ~ 3.2A	1.3 ~ 2.65A	1.1 ~ 2.28A	1 ~ 2A	0.85 ~ 1.77A				
	VOLTAGE TOLERANCE Note.3	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%				
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
	LOAD REGULATION	±1.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
	SETUP, RISE TIME	2500ms, 80ms a	at full load 440	VAC / 347VAC ;	B type 2500ms	, 280ms at 95% l	oad 440VAC/	347VAC					
	HOLD UP TIME (Typ.)	30ms at full load 440VAC / 347VAC											
	VOLTAGE RANGE Note.4 180 ~ 480VAC 254VDC ~ 679VDC												
	FREQUENCY RANGE	47 ~ 63Hz											
INPUT	POWER FACTOR (Typ.)	PF≥0.99/230VAC, PF≥0.98/277VAC, PF≥0.97/347VAC, PF≥0.94/440VAC at full load (Please refer to "Power Factor Chara											
	EFFICIENCY (Typ.)	90%	90%	91%	91%	91%	91%	91%	91%				
	AC CURRENT (Typ.)	0.32A / 347VAC											
	INRUSH CURRENT (Typ.)	COLD START 40A / 440VAC											
	LEAKAGE CURRENT	<0.75mA / 440VAC											
	OVER CURRENT	95 ~ 108%											
		Protection type: Constant current limiting, recovers automatically after fault condition is removed											
	SHORT CIRCUIT	Constant current limiting, recovers automatically after fault condition is removed											
PROTECTION	01/50 1/01 74 05	18 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 60V	59 ~ 65V				
	OVER VOLTAGE	Protection type: Shut down o/p voltage with auto-recovery or re-power on to recovery											
		100°C ±10°C (RTH2)											
	OVER TEMPERATURE	Protection type: Shut down o/p voltage, recovers automatically after temperature goes down											
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")											
	WORKING HUMIDITY	20 ~ 95% RH non-condensing											
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH											
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)											
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes											
	SAFETY STANDARDS Note.6	UL8750, CSA C	22.2 No. 250.0-	08 (except for 48	V,54V), IP65 or II	P67 approved ; D	esign refer to Ul	_60950-1					
	WITHSTAND VOLTAGE			.88KVAC O/P									
SAFETY &	ISOLATION RESISTANCE	I/P-O/P. I/P-FG	i. O/P-FG:100M	Ohms / 500VD0	 C / 25°C / 70% RF								
EMC	EMC EMISSION	,	·		(≧50% load, ≧		r 15V model ) : E	N61000-3-3. FC	C part 15 class				
	EMC IMMUNITY				547, light industr								
	MTBF	174.9Khrs min.			, <u>J</u>	, . ( 5,	<i>n</i>						
OTHERS	DIMENSION	236*68*38.8 m											
	PACKING	1.18Kg; 12pcs/15.2Kg/0.74CUFT											
NOTE.		NOT specially mentioned are measured at 347VAC input, rated load and 25°C of ambient temperature.											
NOTE	Ripple & noise are measure							el capacitor.					

- 3. Tolerance: includes set up tolerance, line regulation and load regulation.
- 4. Derating may be needed under low input voltages. Please check the static characteristics for more details.
- 5. Type A only.
- 6. Safety and EMC design refer to EN60598-1, CNS15233, GB7000.1.
- 7. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.




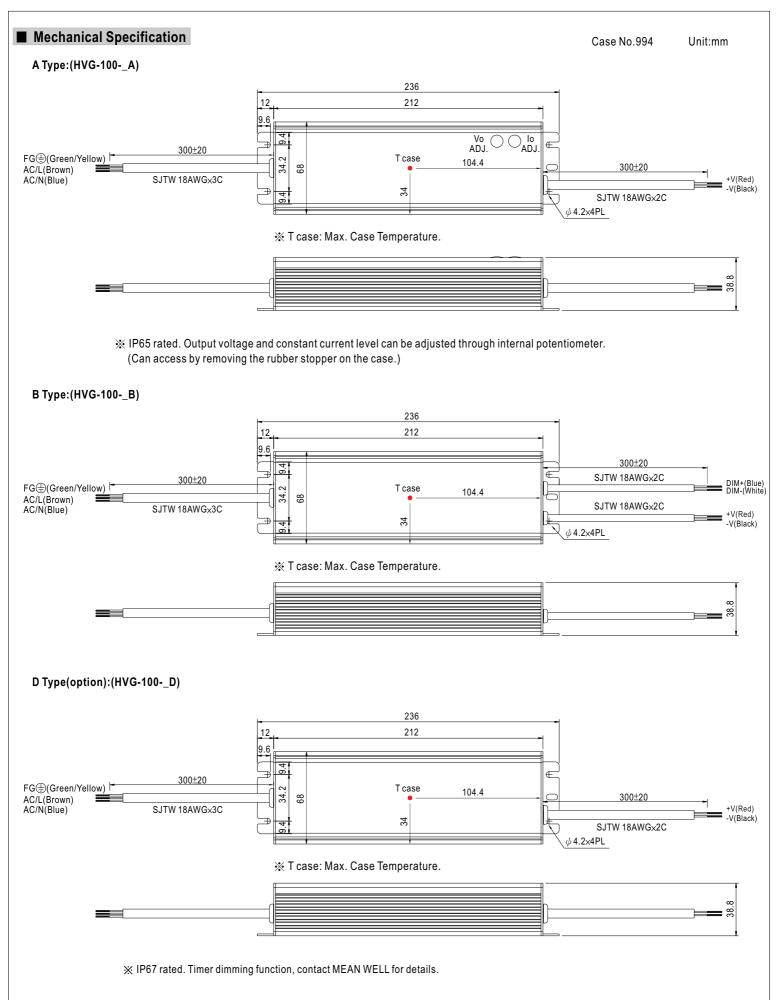



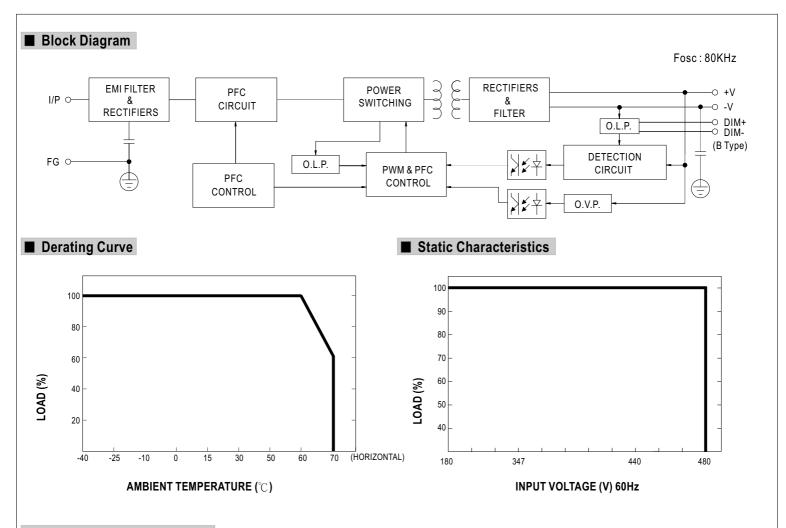

# **■** Power Factor Characteristic

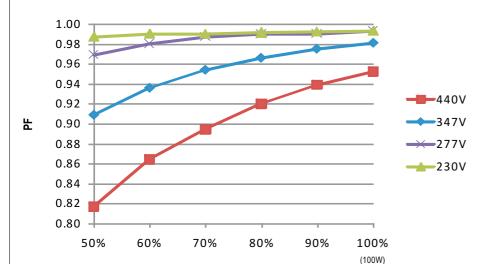


LOAD

**Constant Current Mode** 



# ■ EFFICIENCY vs LOAD (48V Model)

HVG-100 series possess superior working efficiency that up to 91% can be reached in field applications.

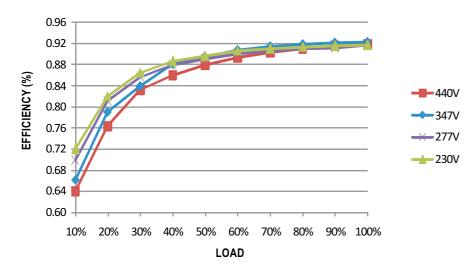


# **■** DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.


Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

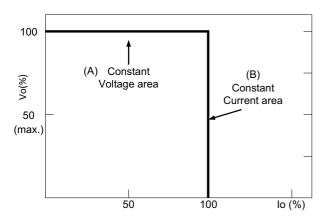

Typical LED power supply I-V curve



### **■** DIMMING OPERATION

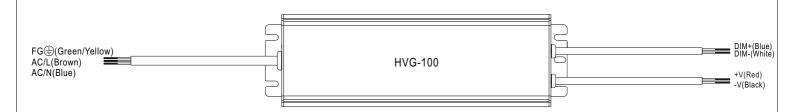

- ※ Please DO NOT connect "DIM-" to "-V".
- X Reference resistance value for output current adjustment (Typical)

Resistance value	Single driver	<b>10K</b> Ω	<b>20K</b> Ω	<b>30K</b> Ω	<b>40K</b> Ω	<b>50K</b> Ω	<b>60K</b> Ω	<b>70K</b> Ω	<b>80K</b> Ω	90ΚΩ	<b>100K</b> Ω	OPEN
	Multiple drivers (N=driver quantity for synchronized dimming operation)	10KΩ/N	20K Ω/N	30KΩ/N	40KΩ/N	50KΩ/N	60KΩ/N	70KΩ/N	80KΩ/N	90K Ω/N	100KΩ/N	
Percentage of rated current		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%

### 

Dimming value	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%

### \* 10V PWM signal for output current adjustment (Typical): Frequency range: 100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%

XUsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

## ■ WATERPROOF CONNECTION

#### Waterproof connector


Suitable Current

10A max.

10A max

Waterproof connector can be assembled on the output cable of HVG-100 to operate in dry/wet/damp or outdoor environment.

Suitable Current

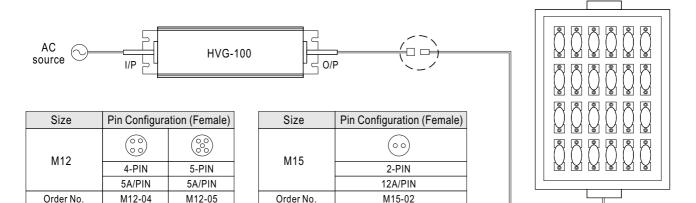


12A max

LED Lamp





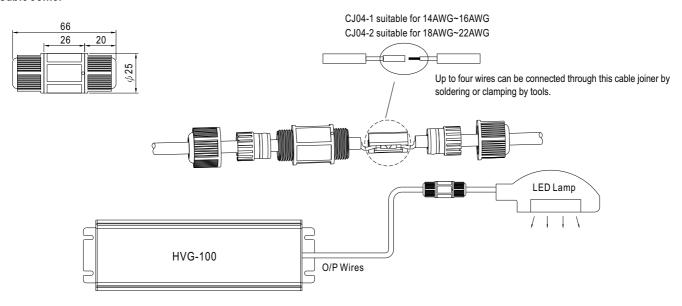

## O Junction Box(Option)

